

BOSCO
BROS., L.L.C. NORCO, LA



INDUSTRIAL CATALOG

VOLUME II

Table of Contents

Bonded Abrasives	4	Batteries	24	Shears, Scissors & Snips	38
Resin Bonded Abrasives		Extension & Power Cords	25	Shears & Scissors	
Coated Abrasives	5	Flashlights & Lanterns	25	Snips	
Coated Disc Abrasives		Strapping Products	25	Wrenches	38
Coated Flap Disc Abrasives		Cable Ties		Adjustable Wrenches	
Non Woven Abrasives	5	Coolers & Chests	26	Chain Tong & Strap Wrenches	
Non Woven Disc Abrasives		Clamps & Vises	26	Combination Wrenches	
Non Woven Pad Abrasives		Clamps & Spreaders		Pipe Wrench Parts & Accessories	
Wire Brush Abrasives	6	Vises		Pipe Wrenches	
Cup Brushes		Extractors & Sets	28	Brushing & Sweeping Products	40
Scratch Brushes		Extractor Sets		Brushes & Brooms	
Wheel Brushes		Files	28	Cleaning Products	40
Adhesive Products	7	Half Round Files		Dishwashing Cleaners	
Adhesives & Glues		Hammers, Sledges, Mallets & Axes	28	Floor & Carpet Cleaners	
Putty		Hammers		Glass Cleaners	
Sealing Products	8	Hand Tool Organizers & Belts	29	Personal Hygiene	41
Caulk Guns		Tool Pouches & Holders		Hand Cleaners	
Sealants		Hex, Torx & Spline Keys	29	Waste Receptacles	42
Threadlockers		Hex Key Sets		Trash Can Liners	
Tape Products	12	Knives & Multi-Purpose Tools	30	Trash Cans	
Duct Tapes		Knife Blades		Wiping Products	42
Electrical Tapes		Knives		Towels & Wipers	
Masking Tapes		Lawn & Garden Tools	32	Crayons	43
Pipe Sealant Tapes		Shovels & Spades		Markers	43
Cleaning Products	14	Sprayers		Pencils	45
Cleaners & Degreasers		Water Hoses		Soapstone Holders	45
Insect & Weed Controlling Products	15	Wheelbarrows		Soapstones	45
Insect Killers		Multi-Purpose Hand Tool Sets	34	Chain, Cable, Rope & Accessories	45
Leak Detectors & Penetrants	16	Multi-Purpose Tool Sets		Straps & Bungee Cords	
Leak Detectors		Pipe Threading Equipment	35	Derrick Tapes	45
Penetrants		Threaders Powered		Flange Pins & Aligners	46
Surface Irregularity Testing Product Accessories		Threaders Powered Accessories		Framing Tools	46
Lubricants & Penetrants	17	Pliers & Cutters	35	Gauging Tapes	46
Anti-Seize Compounds		Bolt & Chain Cutters		Levels	46
Chain & Cable Lubricants		Linemans Pliers		Squares	47
Corrosion Inhibitors		Locking Pliers		Tape Measures	47
Fluids		Specialty Pliers		Covering Products	48
Grease		Tongue & Groove Pliers		Tarps	
Grease Guns		Tubing Cutters		Coco Mats	48
Multi-Purpose Lubricants		Prying Tools	37		
Oils		Bars			
Silicone Lubricants		Putty Knives & Scrapers	38		
Paint & Paint Supplies	23	Scrapers & Putty Knives			
Paint Brushes					
Paints					
Specialty Products	24				
Finding Paste					
Layout Fluids					

Compressors, Blow Guns, Hoses & Fittings	48	Respiratory Protection	68
Blow Guns		Cartridge Respirator Parts & Accessories	
Cutting Tools	49	Cartridge Respirators	
Circular Saws		Disposable Respirator Parts & Accessories	
Drilling & Fastening Tools	49	Disposable Respirators	
Drills		Safety Storage	71
Wrenches		Safety Cans	
Finishing Tools	51	Spill Control Safety	72
Grinders		Sorbents	
Clothing Protection	51	Traffic Safety	72
Aprons		Safety Tapes	
Coveralls & Overalls		Arc Gouging	73
Rainwear		Arc Gouging Electrodes	
Sleeves & Bibs		Filler Metals	73
Ear Protection	52	MIG Welding Wires	
Earmuffs		TIG Welding Wires	
Earplug Parts & Accessories		Welding Stick Electrodes	
Earplugs		Welding/Brazing Alloys & Fluxes	
Eye Protection	57	Gas Cutting & Welding	74
Safety Glass Parts & Accessories		Quick Connects	
Safety Glasses		Tips & Nozzles	
Safety Goggles		Torches & Handles	
Fire, Gas & Water Protection	59	Manual Welding	74
Detectors		Electrode Holders	
Fire Extinguishers		Mig Welding	74
First Aid Safety	60	Mig Gun Parts & Accessories	
Eye Wash		Soldering & Brazing	75
First Aid Kits		Soldering/Brazing Torches	
Hand Protection	60	Torch & Weed Burners	75
Gloves		Welding & Cutting Accessories	75
Head/Face Protection	62	Anti-Spatter & Chemicals	
Faceshields & Visors		Centering Heads	
Hard Hat & Cap Parts & Accessories		Cutting & Burning Guides	
Hard Hats & Caps		Cylinder & Caps	
Welding Helmet Parts & Accessories		Cylinder Pliers & Wrenches	
Welding Helmets		Dry Rod Ovens	
Heat Stress Protection	66	Ground Clamps	
Activity Drinks		Rod Holders	
Sweat Bands		Spark Lighter & Flints	
Locking Devices	67	Tip Cleaners	
Lock Boxes		Welding Blankets, Curtains, & Rolls	
Lockouts & Hasps		Welding Cables & Power Cables	
Padlocks & Cables		Welding Clamps, Spreaders & Holders	
		Welding Hoses	



BONDED ABRASIVES

Resin Bonded Abrasives



Cutting Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast cut rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Thickness: 0.045 in

Arbor Size: 7/8 in

Grit: 60

Speed: 13,300 RPM



SKU	Tool Shape	Dia.
903-1RC4578	T1	4-1/2 in

Depressed Center Combo Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast grinding rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Thickness: 1/8 in

Arbor Size: 5/8 in-11

Grit: 30

Speed: 13300 RPM



SKU	Tool Shape	Dia.
903-41287T	Type 29	4-1/2 in

Depressed Center Cutting Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast cut rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Thickness: 0.045 in

Arbor Size: 7/8 in

Grit: 60

Speed: 13,300 RPM



SKU	Tool Shape	Dia.
903-27RC457	T27	4-1/2 in



Depressed Center Grinding Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast grinding rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Thickness: 1/4 in

Grit: 24



SKU	Tool Shape	Dia.	Arbor Size	Speed
903-4121478	Type 28	4-1/2 in	7/8 in	13300 RPM
903-41247T	Depressed Center	4-1/2 in	5/8 in-11	13,300 RPM

Flexible Depressed Center Wheels

Features:

- Aluminum oxide grain - effective for all steel and ferrous metals.
- Flexible for light stock removal, blending, finishing, and polishing.
- Consistent performance at competitive price.

Thickness: 1/8 in

Arbor Size: 7/8 in

Grit: 30

Speed: 13,300 RPM



SKU	Tool Shape	Dia.
903-45A27M	Flexible Depressed Center	4-1/2 in



PROFESSIONAL POWER TOOL SOLUTIONS

Original Slicer® Cutting Wheels

Features:

- Extremely fast rate of cut.
- Designed with two full layers of high strength fiberglass for safety.
- Consistent performance time after time.
- Burr-free, cool cutting.

Thickness: 0.040 in

Arbor Size: 7/8 in

Grit: 60

Speed: 10200 RPM



SKU	Tool Shape	Dia.
469-655339000	Type 1	6 in

COATED ABRASIVES

Coated Disc Abrasives



Resin Fiber Discs

Features:

- Ideal for blending, finishing and surface preparation.
- Rigid yet flexible backing for the most demanding applications.
- Electrostatically distributed grains for the most consistent grain application.

Abrasive Material: Aluminum Oxide

Mounting: Arbor Hole



SKU	Dia.	Arbor Diam.	Grit	Speed	Body Material
102-45A60	4-1/2 in	5/8 in	60	12,000 rpm	Fiber Backing
102-5A24	5 in	7/8 in	24	10000 RPM	Fiber
102-45A36	4-1/2 in	7/8 in	36	11000 RPM	Fiber

Coated Flap Disc Abrasives



Tiger® Big Cat® High Density Flap Discs

Features:

- A thicker disc with larger flaps which conforms to curved and irregular surfaces while producing a consistent finish.
- 30 to 40 percent longer life than standard flap discs.
- Ideal for a working angle less than 15 degrees.

Speed: 12000 rpm

Abrasive Material: Zirconia Alumina

Tool Shape: Type 27



SKU	Dia.	Grit
804-50803	4-1/2 in	40
804-50808	4-1/2 in	40

NON WOVEN ABRASIVES

Non Woven Disc Abrasives



Scotch-Brite™ Roloc™ Surface Conditioning Disc

Features:

- Tough non-woven disc aggressively deburrs and finishes.
- Open-web construction resists loading and runs cool.
- Conforms well to help preserve irregular or contoured surfaces.

Roughness Grade: Medium

Abrasive Material: Aluminum Oxide



SKU	Speed	Dia.
405-048011-05527	25000 rpm	2 in

Non Woven Pad Abrasives


Scotch-Brite™ General Purpose Scour Pad 96

Features:

- Use for everyday cleaning of most cooking utensils and equipment.
- Scours 2 to 3 times faster and lasts 2 to 3 times longer than comparable pads.
- Non-rusting and resilient, this synthetic pad is an ideal replacement for steel wool or stainless steel scrubbers.

Abrasive Material: Synthetic Fiber

Thickness: 5/8 in




SKU	Roughness Grade
489-082931	Medium Duty

Scotch-Brite™ Hand Pad 7447

Features:

- Hand pads are a great alternative to steel wool, similar performance without the shredding, rusting, or splintering.
- May be used by hand, with a hand pad block, or on an in-line sander.
- Available in a variety of grades, including aluminum oxide, nepheline syenite, or silicon carbide abrasive materials.

Abrasive Material: Aluminum Oxid



SKU	Roughness Grade
405-048011-04029	Very Fine

WIRE BRUSH ABRASIVES

Cup Brushes



Knot Cup Brushes

Features:

- Provides flexible brushing action and cost-effective performance in general purpose cleaning applications.
- Quickly completes rough surface-prep and debris-removal tasks.
- Features a threaded nut, making for smooth, efficient operation on angle grinders.



Wire Size: 0.02 in

Arbor Size: 5/8 in - 11

SKU	Wire Material	Dia.	Trim Length
102-3KC58	Carbon Steel	3 in	1 in
102-4KC58	Carbon Steel	4 in	1-1/4 in

Scratch Brushes



Hand Scratch Brushes

Features:

- Heavy-duty industrial brushes.
- Wire fill and length is unsurpassed.
- Durable wood handle.

Block Material: Wood



SKU	Handle Type	Handle Material	Bristle Material	Bristle Rows
102-387	Shoe	Wood	Carbon Steel	4 X 16
102-387SS	Shoe	Wood	Stainless Steel	4 X 16
102-388	Curved	Wood	Carbon Steel	3 X 19
102-388SS	Curved	Wood	Stainless Steel	3 X 19

Utility Brushes

Features:

- Abrasive metal brush removes corrosion, oxidation.
- Narrow bristle configuration is ideal for cleaning tight spaces.
- Rust-resistant.

Bristle Material: Stainless Steel

Block Material: Wood

Block Width: 1/2 in

Bristle Rows: 3 X 7



SKU	Handle Type	Handle Material
102-30SS	Curved	Wood



Small Hand Scratch Brushes

Features:

- For general cleaning in the plating, metal finishing, aircraft and missile industries.
- Also used with inert arc aluminum welding.

Bristle Material: Stainless Steel

Block Width: 1/2 in

Trim Length: 1/2 in

Overall Length: 7-1/2 in

Bristle Rows: 3 X 7

SKU	Handle Type	Handle Material	Block Material
804-44075	Curved	Plastic	Plastic
804-44167	Curved	Wood	Wood

Wheel Brushes



Knot Wheel Brushes

Features:

- Heavy-duty brushing action with some flexibility.
- Ideal for demanding cleaning applications on somewhat irregular surfaces.
- Use for general-purpose applications.

Dia.: 4 in

Arbor Diam: 5/8 in - 11

No. of Knots: 20

Face Width: 5/8 in

Arbor Thread: 5/8 in - 11



SKU	Bristle Material	Bristle Diam
102-4K58	Carbon Steel	0.014 in
102-4K58S	Stainless Steel	0.014 in

Stringer Bead Wheel Brushes

Features:

- Very narrow face design primarily for weld cleaning and to access hard-to-reach areas.

Arbor Diam: 5/8 in - 11

Arbor Thread: 5/8 in - 11



SKU	Bristle Material	Bristle Diam	Dia.	No. of Knots	Face Width
102-4S58	Carbon Steel	0.02 in	4 in	30	4 in
102-4S58S	Stainless Steel	0.02 in	4 in	30	1/4 in
102-6S58	Carbon Steel	0.02 in	6 in	48	6 in



Roughneck® Max Stringer Bead Wheels

Features:

- Delivers unmatched weld cleaning performance by maximizing life, efficiency, and consistency.
- Improved feel and comfort during use makes brush operation effortless.
- Stronger, sharper wire delivers consistency and performance you can count on.

Dia.: 4 in

Arbor Diam: 5/8 in-11 UNC

No. of Knots: 32

Face Width: 3/16 in



SKU	Bristle Material	Bristle Diam
804-13131	Steel	0.020 in

ADHESIVE PRODUCTS

Adhesives & Glues



3M™ Super 77™ Multipurpose Spray Adhesive

Features:

- **AGGRESSIVE TACK:** Offers a fast, medium-strength initial grab for a quick bond
- **REPOSITION AND ADJUST:** Features sufficient open time to properly position and bond materials
- **HIGH-SOLIDS CONTENT:** Supports low soak-in to help provide high coverage and soft, non-dimpling adhesive lines
- **MADE FOR PROFESSIONALS:** Provides medium-strength bonding for demanding applications
- **VERSATILE ADHESIVE:** Bonds paper, corrugated board, fabric, foam, wood, and more

Adhesive Tensile Shear: 300 psi

Tensile Strength: 300 psi

Chemical Compound: Synthetic Elastomer

Working Time: 15 sec to 15 min

Packing Type: Aerosol Can



SKU	Capacity vol.
405-021200-21210	16.75 oz



5 Minute® Epoxies

Features:

- Rapid-curing, general-purpose adhesive/encapsulant which easily dispenses and mixes in seconds.
- Dries in 15 minutes and reaches functional strength in 1 hour.
- Bonds rigid durable substrates such as metals, glass, ceramics, concrete and wood in all combinations.
- Forms a clear hard rigid bond self-leveling liquid in minutes.

Adhesive Tensile Shear: 1,900 psi @ 0.050 in Bondline

Chemical Compound: Epoxy

Working Time: 3 min to 6 min @ 72° F



SKU	Capacity vol.
230-14250	25 mL



404™ Instant Adhesive

Features:

- Fast fixturing.
- Designed for bonding of plastics and elastomeric materials.
- Frequently used for rubber O-ring bonding.

Tensile Strength: 3,500 psi

Gap Fill: 0.005 in

Chemical Compound: Ethyl Cyanoacrylate

Working Time: 30 sec

Packing Type: Bottle



SKU	Capacity vol.
442-135465	0.333 oz

495™ Super Bonder® Instant Adhesive

Features:

- Ensure a super-strong bond, with super bonder, designed to bond rubber, metal, and plastic parts.
- Easy to dispense and use.
- Cures rapidly at room temperature without the need for heat or light.

Tensile Strength: 2,750 psi

Gap Fill: 0.004 in

Chemical Compound: Cyanoacrylate

Working Time: 15 sec

Packing Type: Bottle



SKU	Capacity vol.
442-135467	1 oz

Putty



Plastic Steel® 5 Minute® Putty (SF) Kits



Features:

- Fast-curing, steel-filled epoxy for dependable emergency repairs in less than one hour.
- Mixes, applies, and cures at temperatures as low as 40° F.
- Cures to a tough, steel-filled material.
- Can be machined, drilled, tapped, or sanded.
- 5-minute working time.

Hardness: 66 Shore D

Full Cure Time @ Temp.: 7 days @ 75° F

SKU	Temp. Range
230-10240	200° F

Plastic Steel® Putty (A) Kits



Features:

- Metal-filled epoxy putty used for hundreds of routine maintenance, production, and tooling applications.
- Patch and repair areas where welding or brazing would be undesirable or impossible.
- Bonds to most metals, concrete, and some plastics.
- Cures at room temperature and forms a tough durable metallic mass that can be drilled, tapped, machined, or painted.
- Excellent resistance to oil, gasoline, water and many chemicals.

Hardness: 85 Shore D

Full Cure Time @ Temp.: 7 days @ 75° F

SKU	Temp. Range
230-10110	Dry 250° F; Wet 120° F

Titanium Putty Kits



Features:

- High-performance, non-rusting titanium-reinforced epoxy.
- Engineered for making repairs to machinery and equipment that can be precision machined.
- Withstands heavy loads in hard chemical environments.
- High compressive strength.
- 21-minute working time.

Hardness: 87 Shore D

Full Cure Time @ Temp.: 7 days @ 75° F

SKU	Temp. Range
230-10760	Dry 350° F; Wet 150° F

SEALING PRODUCTS

Caulk Guns



Caulking Guns

Features:

- Half-barrel caulk gun with smooth rod and quick-release mechanism.
- Suitable for light-to-medium applications of glazing, sealing or caulking.
- Holds most standard cartridges.
- Thrust ratio 7:1.

SKU	Cartridge Size
630-3985	1/10 gal

Sealants



Cross-Check™ Torque Seal® Tamper-Proof Indicator Paste



Features:

- Provides a convenient visual method for identification of vibratory loosening or tampering in nuts, bolts, fasteners, and assemblies.
- Highly visible under ambient light and fluorescent under UV light.
- Tamper-proof torque mark.
- Safe for most surfaces.
- Excellent adhesion.

Temp. Range: -20° F - 400° F

Color: Orange

Full Cure Time @ Temp.: 1 to 2 h

SKU	Capacity
253-83314	0.8 oz



Cold Weld Compounds

Features:

- Nontoxic.
- Superstrong and durable.
- Made in the USA.

Temp. Range: - 300° F

Full Cure Time @ Temp.: 4 h @ 70° F



SKU	Capacity
803-8276	1 oz



Cross-Check™ Tamper Proof Torque Mark

#1 TOP SELLER

FLUORESCENT
UNDER BLACK/UV LIGHT ONLY

VISUALLY
DETECTS LOOSE NUTS AND BOLTS

PROVIDES
WARRANTY PROTECTION

FULLY CURES
IN 24 HOURS

BOEING SPECIFICATION
BMS8-45 TYPE II

DYKEM® Cross-Check™ provides a convenient visual method for identification of vibratory loosening or tampering in nuts, bolts, fasteners, and assemblies. Provides warranty protection against tampering. Marks will be easily broken if parts are tampered with or become loose. Highly visible under ambient light. Excellent adhesion to metal and other substrates.

Dry to touch/handle in 30-40 minutes. 80% curing occurs between 48-72 hours. Completion of curing takes place between 7-10 days Exposing to elevated temp - OR blowing hot air can speed up the drying/curing process.

ADDITIONAL FEATURES

- It's like a wax seal for critical holds and fastening
- Safe for most surfaces
- Highly visible
- Excellent adhesion
- Dries to the touch: 1-2 hours
- GHS compliant labeling
- Two year shelf life



AVAILABLE PRODUCT					
ORS Item #	MFG #	Color	Container	Case Pack	Case Wt.
253-83314	83314	Orange*	1 oz Tube	24	2 lbs.
253-83315	83315	Green*	1 oz Tube	24	2 lbs.
253-83316	83316	Red*	1 oz Tube	24	2 lbs.
253-83317	83317	Yellow*	1 oz Tube	24	2 lbs.
253-83318	83318	Blue*	1 oz Tube	24	2 lbs.
253-83319	83319	White	1 oz Tube	24	2 lbs.
253-83320	83320	Pink	1 oz Tube	24	2 lbs.
253-83321	83321	Gray	1 oz Tube	24	2 lbs.

*Orange, green, red, yellow and blue fluoresce under black/UV light only





515™ Gasket Eliminator® Flange Sealants

Features:

- Makes flexible gaskets for rigid machined flanges with less than .050" gap.
- Flexes with flanges that move in service.

Temp. Range: -65° F - 300° F

Full Cure Time @ Temp.: 24 h @ 77° F



SKU	Capacity
442-135479	50 ml

565™ PST® Thread Sealants

Features:

- A general purpose instant sealant for tapered and straight/tapered fittings.
- Controlled strength for ease of disassembly.

Temp. Range: -65° F - 300° F



SKU	Capacity	Full Cure Time @ Temp.
442-88551	50 ml	72 h @ 72° F
442-88552	250 ml	24 h

567™ PST® Thread Sealants, High Temperature

Features:

- Instant thread sealant for taper/ taper threads and fittings.
- Great choice for high temperature and high pressure applications.
- Controlled strength for easy disassembly with hand tools.
- Prevents leaks, does not shrink, crack, creep, or shred.
- Provides excellent solvent resistance.
- Eliminates galling on stainless steel.

Temp. Range: -65°F - 480°F



SKU	Capacity	Color	Full Cure Time @ Temp.
442-2087067	50 mL	Off White	24 Hours @ 72° F
442-2087069	250 mL	White	24 Hours @ 72° F



5900® Flange Sealants, Heavy Body RTV Silicone

Features:

- Superior flexibility and adhesion.
- Provides instant seal.
- Non-corrosive, low odor, and low volatility.

Temp. Range: -65° F - 500° F

Full Cure Time @ Temp.: 24 h @ 77° F

SKU	Capacity
442-212184	300 mL

Superflex® Red High Temp RTV Sealants

Features:

- Makes gaskets that resist temperatures to 600°F intermittent.
- Resists aging, weather, and thermal cycling without shrinking, cracking, or hardening.

Temp. Range: -75° F - 600° F

Full Cure Time @ Temp.: 24 h @ 77° F



SKU	Capacity
442-135507	80 ml

Thread Sealants with PTFE

Features:

- A general purpose sealant with the added lubricity of PTFE for metal pipes.
- Won't shred like tape and allows easy disassembly.

Temp. Range: -65° F - 300° F



SKU	Capacity
442-1527514	1 pt



Form-A-Gasket® Sealants

Features:

- Options include No 1 Fast Drying/Hard Setting, No 2 Slow-Drying/Non-Hardening, and No 3 Aviation Sealant Liquid.
- No 2 is a slow-drying, non-hardening sealant.

Temp. Range: -65° F - 400° F

Full Cure Time @ Temp.: 24 h



SKU	Capacity
230-80011	11 oz



Thread Sealants with PTFE

Features:

- Economical general-purpose fitting sealant.
- Outperforms tapes and pipe dopes.
- Seals and resists pressure in air, oil, diesel fuel and hydraulic systems.
- Remains pliable at high and low temperatures.

Temp. Range: -65° F - 300° F



SKU	Capacity
230-80632	4 oz
230-80633	16 oz



A CSW Industrials Company

Tru-Blu™ Pipe Thread Sealants

Features:

- For refrigeration and industrial applications.
- Recommended for use on galvanized steel, iron, brass, copper, aluminum, stainless steel, polyethylene, fiberglass reinforced, PVC and CPVC pipe.
- Ideal for use as positive lock and seal on threaded fasteners.

Temp. Range: -50° F - 350° F

Full Cure Time @ Temp.: 24 h @ 77° F



SKU	Capacity
622-31431	1 pt



Red Devil

100% Silicone Architectural Grade RTV Sealants

Features:

- Superior quality, multi-purpose sealant provides a long-lasting, weather-resistant seal to glass, metal, plastic and ceramic surfaces.
- Offers excellent adhesion, flexibility, and durability without cracking, shrinking, or peeling.
- Can be applied at temperatures below freezing.

Temp. Range: -60° F - 400° F

Full Cure Time @ Temp.: 24 h @ 77° F



SKU	Capacity
630-0826/01	9.8 fl oz



Contractor RTV Silicone Sealants

Features:

- Interior/Exterior, flexible watertight silicone sealant made with 100% silicone.
- Minimal shrinkage, great for around windows/doors, plumbing, and water pipes.

Temp. Range: -49° F - 302° F

Full Cure Time @ Temp.: 24 h @ 77° F



SKU	Capacity
425-WL099110C	10 oz

Threadlockers



242™ Threadlockers, Medium Strength

Features:

- Medium strength, medium viscosity, methacrylate-based threadlocking adhesive offering general purpose qualities.
- Provides quick fixture times on steel, brass and stainless steel of 5, 15 and 20 min respectively.
- Thixotropic to reduce adhesive migration.

Thread Size: 1/4 in - 3/4 in

Temp. Range: -65° F - 300° F

Curing Method: Anaerobic



SKU	Capacity Vol.
442-135354	10 ml
442-135355	50 mL

243™ Medium-Strength Primerless Threadlockers

Features:

- General purpose threadlocker that provides a medium strength bond.
- Seals and secures metal nuts and bolts to prevent loosening due to shock and vibration.
- Works on all metals, including passive substrates, such as stainless steel, aluminum, and plated surfaces.
- Proven to be tolerant of minor contamination due to industrial oils, such as motor oils, corrosion prevention oils, and cutting fluid.

Thread Size: 1/4 in - 3/4 in

Temp. Range: -65° F - 360° F

Fix Cure Time @ Temp.: 5 min @ 72° F

Curing Method: Anaerobic



SKU	Capacity Vol.
442-1329467	50 mL

LOCTITE

262™ Threadlockers, Medium to High Strength

Features:

- Red, general purpose, medium to high strength, thixotropic methacrylate-based adhesive.
- Steel fixture time is 15 minutes, brass 8 minutes, and stainless steel 180 minutes.
- It fluoresces under UV light to allow monitoring.
- Ideal for applications where any migration of the adhesive must be prevented.
- Can tolerate slight contaminations of industrial oils.
- Suitable for all metal fasteners.

Thread Size: - Up to 3/4 in

Temp. Range: -65° F - 300° F

Curing Method: Anaerobic



SKU	Capacity Vol.
442-231926	10 ml
442-135374	50 ml

263™ High Strength Red Threadlockers

Features:

- High strength threadlocker is designed for permanent locking and sealing of threaded fasteners.
- Primerless.
- Offers high temperature performance.
- Oil tolerant.
- Particularly suited for heavy duty applications.
- Works on active metals and passive substrates.

Thread Size: - 1 in

Temp. Range: -65° F - 360° F

Fix Cure Time @ Temp.: 10 min @ 72°F

Curing Method: Anaerobic



SKU	Capacity Vol.
442-1330585	50 mL

271™ High Strength Threadlockers

Features:

- High strength, low viscosity, red, methacrylate-based threadlocking adhesive which fluoresces under UV light to allow monitoring.
- With steel fixture time of 10 minutes, brass 5 minutes and stainless steel 15 minutes.
- Can tolerate slight contaminations of industrial oils.
- Suitable for all metal fasteners.
- Breakaway torque on M10 bolts of 26 Nm.
- Seals threads, allows through-hole tapping.

Thread Size: - Up to 1 in

Temp. Range: -65° F - 300° F

Curing Method: Anaerobic



SKU	Capacity Vol.
442-135380	10 ml
442-135381	50 ml

LOCTITE

277™ High-Strength Threadlockers

Features:

- High strength, high viscosity.
- Suited to large threads.
- Prevents fasteners from loosening due to vibration.
- Protect against rust and corrosion.
- Removable with heat and hand tools.

Thread Size: < 7/8 in - 7/8 in

Temp. Range: -65° F - 300° F

Fix Cure Time @ Temp.: 60 min @ 77° F

Curing Method: Anaerobic



SKU	Capacity Vol.
442-88448	50 mL

TAPE PRODUCTS

Duct Tapes



3M™ All Purpose Duct Tape DT8



Features:

- Instant adhesion to a wide variety of surfaces, including metal, glass, plastic and sealed concrete, by an aggressive natural rubber adhesive.
- Woven cloth scrim allows tape to tear easily by hand.
- Conformable backing is good for use on contoured surfaces.
- Good tensile strength for light duty bundling, repair, and holding.

Width: 1.88 in

Length: 60 yd

Thickness: 8 mil

Temp. Range: 150° F

Tensile Strength: 31 lb-in

SKU
405-689330-17225

Electrical Tapes



3M™ Temflex™ Vinyl Electrical Tape 165

Features:

- Temflex™ Vinyl Electrical Tape 165 is a good quality, multi-purpose vinyl insulating tape.
- It has great resistance to moisture and varying weather conditions.

Material: Polyvinyl Chloride

Thickness: 6 mil



SKU	Length	Width
405-076308-92568	60 ft	3/4 in



General Purpose Vinyl Electrical Tapes

Features:

- Excellent adhesion and elongation properties.
- General purpose electrical tape for household and industrial applications.

Material: PVC; Vinyl

Thickness: 7 mil



SKU	Length	Width
761-602	60 ft	3/4 in



Scotch® Super 33+™ Vinyl Electrical Tape

Features:

- Premium grade tape that provides electrical insulation for all wires and cables rated up to 600 V.
- Designed for above/below grade, indoor/outdoor, low and high voltage applications, and for harnessing cables.
- Offers electrical and mechanical protection with the combination of a pressure sensitive, rubber resin adhesive and elastic, PVC backing.
- Provides a protective jacket for high voltage cable splices.
- Highly resistant to UV rays, abrasion, moisture, alkalis, solvents, and many acids.

Material: Rubber-Based Adhesive; Vinyl (PVC) Backing

Thickness: 7 mil



SKU	Length	Width
500-061335	52 ft	3/4 in
405-638060-29035	76 ft	3/4 in



Scotch® Vinyl Electrical Tape Super 88

Features:

- For indoor and outdoor applications.
- Pressure sensitive rubber based adhesive.
- Compatible with solid dielectric cable insulations.
- Compatible with rubber and synthetic splicing compounds, as well as epoxy and polyurethane resins.
- Inhibits corrosion of electrical conductors.

Material: Polyvinyl Chloride (PVC) Backing

Thickness: 8.5 mil



SKU	Length	Width
500-061434	66 ft	3/4 in

Scotch® Vinyl Color Coding Electrical Tape 35

Features:

- Designed for use in phase identification, color coding of motor leads and piping systems and for marking safety areas.
- Has excellent electrical insulating properties, wraps smoothly, conforms well and holds over a wide range of temperatures.
- Pressure-sensitive rubber based adhesive.
- Inhibits corrosion of electrical conductors.

Thickness: 7 mil

Material: Polyvinyl Chloride (PVC) Backing



SKU	Length	Width	Color
500-108108	66 ft	3/4 in	Red
500-108283	66 ft	3/4 in	White
500-108856	66 ft	3/4 in	Brown
500-108443	66 ft	3/4 in	Yellow
500-108368	66 ft	3/4 in	Blue
500-108511	66 ft	3/4 in	Green
500-108696	66 ft	3/4 in	Orange

Masking Tapes



3M™ High Performance Masking Tape 401+



Features:

- Designed to deliver super-sharp paint lines and resist paint bleed-through.
- Provides superior adhesion to metal, glass, rubber and plastic.
- Comes off cleanly with no sticky residue left behind.
- Ideal for industrial jobs such as two-tone color applications on buses, trucks, ambulances and airplanes.
- Can withstand surface temperatures up to 250°F for 30 minutes.

Width: 48 mm

Roll Length: 55 m

Thickness: 6.7 mil

SKU	Material
405-051115-64763	Crepe Paper



ScotchBlue™ Original Painter's Tape 2090-48NC



Features:

- This tape removes cleanly without adhesive transfer or surface damage for up to 14 days, even in direct sunlight.
- It is a medium adhesion tape that is ideal for painted walls and trim, woodwork, glass and metal.

Width: 2 in

Roll Length: 60 yd

Thickness: 5.4 mil

SKU	Material
405-051115-03686	Crepe Paper

Pipe Sealant Tapes



White PTFE Thread Sealant Tapes



Features:

- Tapes can be used in a wide variety of applications, from general purpose service such as water and air, to difficult service such as acids and pure oxygen.
- Easy installation, several wraps around the male threads and you're done.
- Made of 100% PTFE; compatible with almost any process fluid (except molten alkalis and elemental fluorine).
- Unlimited shelf life, no age deterioration, non-hardening.

Thickness: 0.0035 in

SKU	Length	Width
102-1/2X520PTFE	520 in	1/2 in
102-1X520PTFE	520 in	1 in

CLEANING PRODUCTS

Cleaners & Degreasers



B-12 CHEMTOOL® Carburetor/Choke Cleaners



Features:

- Cleans petroleum residue from fuel systems, fuel injectors, valves, rings and pistons.
- Also works to disperse moisture.
- Great for use on oil returns, lifters, PCV valves, and oil pump screens.
- Utilizes High Energy Solvent Technology.
- Regular use ensures higher compression, fewer repairs, lower operation costs and increased spark plug and injector life.

Hazardous Substances Act

Chemical Compound: Acetone; Methanol; Toluene

SKU	Capacity Vol.
084-0117	16 oz



Brake Parts Cleaners

Features:

- Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads.
- Using a brake cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system.
- Formulated to quickly and effectively remove grease, brake dust, brake fluids, oils, and other contaminants from brake parts, lining, pads.



SKU	Capacity Vol.
125-05084	14 oz
125-05050	20 oz
125-05088	20 oz
125-05089	20 oz

Heavy Duty Degreasers

Features:

- Effectively removes grease, oil, tar, and more to increase operating efficiency of equipment.
- Evaporates quickly.
- Leaves no residue and has no flash or fire point, making it an excellent alternative to 1,1,1-based cleaners.
- Use caution on plastics.



Chemical Compound: Chlorinated Solvent

SKU	Capacity Vol.
125-03095	20 oz

Lectra Clean® Heavy Duty Electrical Parts Degreasers

Features:

- Effectively removes contaminants to increase operating efficiency of energized electrical equipment.
- Evaporates quickly, leaves no residue and has no flash or fire point.
- Designed and labeled to be used on equipment where energy and/or residual exists during cleaning.



Chemical Compound: Chlorinated; Solvent

SKU	Capacity Vol.
125-02018	20 oz

QD™ Contact Cleaners

Features:

- Suitable for cleaning sensitive electronics and electrical equipment without leaving a residue.
- Evaporates quickly, leaves no residue and is safe to use on all plastics.
- Use where lower flashpoint cleaners are acceptable.

Chemical Compound: Petroleum Distillate



SKU	Capacity Vol.
125-03130	11 oz



PreSolve® Orange Degreasers

Features:

- High performance industrial degreaser which cleans on contact.
- Fast acting, deep penetration.
- Does not contain chlorinated solvents.
- Dielectric breakdown strength 32KV.
- Low residue.
- Safe on all metals and most plastics (test).
- Inverted spray valve.

Chemical Compound: Petroleum Distillates



SKU	Capacity Vol.
428-01420	15 oz



Industrial Cleaners and Degreasers

Features:

- Concentrate dilutes up to 1:30.
- Easily cuts through thick grease, oils, hydraulic fluids and built-up grime on all washable surfaces.
- Non-abrasive, non-corrosive, non-flammable and VOC compliant formula.
- Safe for use in cleaning equipment including floor scrubbers, carpet cleaners and parts washers.
- Orally non-toxic and readily biodegradable formula*.
- EPA Safer Choice product.
- Safer than caustic cleaners and solvents.

Chemical Compound: Ethoxylated Alcohol; Sodium Citrate; Sodium Carbonate; Citric Acid



SKU	Capacity Vol.
676-2710001213012	24 oz
676-2710200613005	1 gal
676-2700000113006	5 gal
676-2700000113008	55 gal

INSECT & WEED CONTROLLING PRODUCTS

Insect Killers



Wasp and Hornet Killer Plus™ Insecticide

Features:

- Fast acting, high strength insecticide.
- Ergonomic trigger that provides control, even with gloved hands.
- Accurate up to 20 feet away.



SKU	Container Size
125-14010	20 oz

LEAK DETECTORS & PENETRANTS

Leak Detectors

SNOOP

Leak Detectors

Features:

- Non-Toxic, non-flammable.
- Does not collect dust.
- Does not contain chlorine, aliphatic amines, or ammonium compounds.

Temp. Range: 27° F - 200° F



SKU	Capacity Vol.
747-80Z-SNOOP	8 oz

Penetrants



PB™ Penetrating Catalysts

Features:

- Great for loosening rusted or frozen screws and bolts.
- Effective rust inhibitor.
- Non-evaporating lubricant.
- Penetrates into hard-to-reach areas.
- Suitable for brake, exhaust and suspension system jobs.



SKU	Capacity Vol.
108-16-PB-DS	11 oz



Knock'er Loose® Penetrating Solvents

Features:

- An industrial strength, low viscosity super penetrant designed to quickly loosen and free seized, bound, or frozen fasteners.
- Quickly permeates rust, scale, gum, grease, and corrosion.
- NSF Category Code H2.



SKU	Capacity Vol.
125-03020	16 oz



Spotcheck® SKC-S

Features:

- Non-chlorinated cleaner/remover.
- Used as a precleaner, a post cleaner and a penetrant remover.
- Recommended general purpose.



SKU	Capacity Vol.
387-01-5750-78	16 oz

Spotcheck® SKL-SP2 Solvent Removable Penetrant

Features:

- Choose a dependable penetrant, like this solvent removable red color contrast penetrant.
- Offers maximum reliability in locating surface-open flaws and discontinuities.
- Has been successfully used on non-porous ceramics and other similar materials.



SKU	Capacity Vol.
387-01-5155-78	16 oz

Surface Irregularity Testing Product Accessories



Spotcheck® SKD-S2 Solvent Developers

Features:

- Non-halogenated, ready-to-use solvent developer.
- Suspends white developing particles in a fast drying solvent.
- Produces opaque white coating that provides excellent contrasting background for penetrant indications.



SKU	Capacity Vol.
387-01-5352-78	11.6 oz

LUBRICANTS & PENETRANTS

Anti-Seize Compounds

JET-LUBE®

Kopr-Kote® High Temperature Anti-Seize and Lubricants

Features:

- Provides a shield against metal-to-metal contact, preventing seizure and corrosion.
- Assures protection against rust, oxidation, and corrosion.
- Specially formulated to prevent excessive over torque issues and has a very high static friction factor of 0.17.
- Unique blend of complex thickeners to help evenly distribute the copper flake onto the metal surfaces to eliminate metal to threaded metal contact.

Temp. Range: -65° F - 1,800° F

Chemical Compound: Petroleum Based

Thickener: Aluminum Complex

Physical Form: Paste or Gel

Flash Point: 430° F



SKU	Capacity Wt.
399-10004	1 lb

LOCTITE®

Food Grade Anti-Seize

Features:

- Prevents seizure, galling, and friction in stainless steel and other metal parts.
- Used in industrial food industries and general plant maintenance.
- Metal free formulation.

Temp. Range: -29 °C - 400 °C

Chemical Compound: Mineral Oil; Calcium Dihydroxide

Physical Form: Paste or Gel

Flash Point: 309.2 °F



SKU	Capacity Wt.
442-1167237	8 oz

LOCTITE®

LB 8008™ C5-A® Copper Based Anti-Seize Lubricants

Features:

- Exclusive formula suspends copper and graphite in a high quality grease.
- Protects metal parts from rust, corrosion, galling, and seizing.
- Establishes greater clamp load.
- Known as Loctite® C5-A®.

Temp. Range: -20 °F - 1800 °F

Chemical Compound: Petroleum; Mineral Oil; Calcium Dihydroxide; Copper; Graphite; Quartz

Physical Form: Paste

Flash Point: >199.4 °F



SKU	Capacity Wt.
442-234263	8 oz
442-160796	1 lb

Nickel Anti-Seize

Features:

- Copper-free.
- For preventing corrosion, seizing, galling in harsh, chemical environments, and temperatures.
- Contains tenacious metals, oils and graphite materials which cannot be burned away or removed by slow moving parts.

Chemical Compound: Graphite; Mineral Oil; Nickel

Physical Form: Paste

Flash Point: >199.4 °F



SKU	Capacity Wt.	Temp. Range
442-235028	8 oz	-65 °F - 2400 °F
442-135543	1 lb	-65 °F - 2400 °F

Silver Grade Anti-Seize Lubricants

Features:

- Heavy duty, temperature resistant, petroleum-based lubricant compound fortified with graphite and metallic flake.
- Inert and will not evaporate or harden in extreme cold or heat.

NLGI Grade: 1

Temp. Range: -15 °F - 1600 °F

Chemical Compound: Graphite; Mineral Oil

Physical Form: Paste

Flash Point: >199.4 °F



SKU	Capacity Wt.
442-235005	1 lb



Regular Grade Compounds

Features:

- Protects against rust, corrosion, carbon fusion and seizure at high temperatures.
- Keeps parts working longer with less wear, and enables faster disassembly when repairs are needed.

Temp. Range: -297°F - 1800 °F

Chemical Compound: Copper; Graphite; Aluminum

Physical Form: Liquid

Flash Point: 475 °F



SKU	Capacity Wt.	Packing Type
535-30803820	8 oz	Brush Top Can
535-30803827	16 oz	Aerosol Can
535-30803817	1 lb	Brush Top Can

Chain & Cable Lubricants



Food Grade Chain Lubes

Features:

- No known ozone depleting chemicals.
- Non-drying film.
- Designed to keep roller drive and conveyor chains lubricated.
- Foaming action.
- P-stream button dispenses narrow, forceful stream.
- Reduces friction and wear that causes metal fatigue, including in surface cracks and overhead applications.
- Uses include non-food applications as well as where incidental food contact may occur, including in meat and poultry plants.



SKU	Temp. Range
125-03055	8° F - 325° F



Chain & Cable Fluids

Features:

- Superior penetrating oil.
- A cleansing non-gumming oil.
- Lubricates wire rope, chains, cables, any moving metal surfaces.
- Prevents rust and corrosion.
- Protects brightwork, loosens rusty nuts and bolts.
- Ideal for tapping and drilling.



SKU
293-L0135-063

Corrosion Inhibitors



Bright Zinc Galvanizing Primers

Features:

- Reduced M.I.G. weld spattering.
- Prevents rust and corrosion.
- Protects welded surfaces.
- Repairs Hot Dip Galvanizing with brighter finish.
- Will not blister or burn away.



SKU	Capacity Vol.
905-RW109B-12	12.75 oz



3-36® Multi-Purpose Lubricants and Corrosion Inhibitors

Features:

- A versatile petroleum-based compound that forms a clear, thin film that lubricates and protects against wear and corrosion.
- Multi-purpose product lubricates, protects, displaces moisture, and cleans.
- Frees rusted parts.

Temp. Range: -50° F - 250° F

Chemical Compound: Petroleum Based

Flash Point: 192° F

Recommended Film Thickness: 0.025 to 0.075 mil



SKU	Capacity Vol.
125-03005	16 oz



SP-400™ Corrosion Inhibitors

Features:

- Firm, waxy film is highly resistant to humidity and salt spray and never becomes brittle.
- Long term protection (up to 2 years outdoors) for all metals during shipment or extended storage.
- Waxy film seals out moisture completely.

Packing Type: Aerosol Can

Chemical Compound: Solvent

Flash Point: <0° F

Recommended Film Thickness: 2 mil Dry



SKU	Capacity Vol.
125-03282	16 oz

Zinc-It® Instant Cold Galvanize Coatings

Features:

- High-performance coating of >93% pure zinc that electrochemically bonds with ferrous metals to form a galvanic cell.
- It actively fights rust and corrosion.
- Dries quickly.
- Outdoor protection for 1 to 2 years.

Packing Type: Aerosol Can

Temp. Range: - 130° F Continuous; 150° F Intermittent

Chemical Compound: Acrylic

Flash Point: -2° F

Recommended Film Thickness: 2 to 3 mil



SKU	Capacity Vol.
125-18412	16 oz



Cold Galvanizing Compounds

Features:

- Provides corrosion protection to ferrous metal surfaces.
- Good for welded joints, guard rails, corrugated metal buildings, and refinery pipes.
- Best long term rust protection.
- Dry time set to touch in 3-5 min., hard dry in 48 hrs.

Packing Type: Aerosol Can

Chemical Compound: Zinc

Flash Point: <0 °F

Recommended Film Thickness: 3-4 mils



SKU	Capacity Vol.
205-7007	13 oz



Galva Bright Premium

Features:

- Stops rust and corrosion on any iron or steel surface.
- Zinc-rich formula for long-lasting protection.
- Ready-to-use, the application can be sprayed or brushed on.
- Drying Time -Tack-free: 3-5 min., Dust-free: 5-10 min., To touch: 15-20 min., Dry: 24 hrs.

Packing Type: Aerosol Can

Chemical Compound: Zinc

Flash Point: <0 °F



SKU	Capacity Vol.
205-7008	13 oz



Fluid Film® Preventive & Lubricants

Features:

- Is a lanolin based rust/corrosion preventive and lubricant that provides long term protection and lubrication for all metal surfaces.
- Locks out and displaces moisture while lubricating moving parts for extended periods of time.

Packing Type: Aerosol Can

Temp. Range: 32° F - 120° F

Chemical Compound: Petroleum Oil

Flash Point: 405° F



SKU	Capacity Vol.
275-AS11	11.75 oz



LPS® 3® Premier Rust Inhibitors

Features:

- Protects steel against rust and corrosion for up to 2 years (Indoor storage.
- 9 months outdoor storage).
- Penetrates to displace moisture.
- Resists moisture, sand, dirt, dust and vibration.
- Does not contain chlorinated solvents or silicone.
- Non-staining.
- Safe on most surfaces.

Packing Type: Aerosol Can

Chemical Compound: Petroleum

Flash Point: 64.4° F

Recommended Film Thickness: 3 to 7 mil (Wet); 1 to 3 mil (Dry)



SKU	Capacity Vol.
428-00316	11 oz



Brite® Zinc® Galvanizing Compounds

Features:

- Repair damaged or welded galvanizing.
- Weld-thru, fast dry, meets ASTM A780.
- Brite silver, matches hot-dip.

Chemical Compound: Zinc Rich

Flash Point: -4° F



SKU	Capacity Vol.
388-B-100	16 oz

Fluids



Rapid Tap® Heavy Duty Cutting Fluids

Features:

- Greatly extends tool life.
- Super-fine machined finish in operation after operation.
- Excels in tough materials.
- Contains no 1,1,1-trichloroethane or other ozone-depleting chemicals.



SKU	Capacity Vol.
618-RAPTAP-PTNEW	16 oz



EP-Xtra® Cutting Fluids

Features:

- Outstanding performance for any cutting operation on any metal.
- Absolutely without equal on hard metals and on cuts requiring extreme pressure or long cutting times.
- Metal cutting fluid used to increase speed, extend tool life and improve cut quality



SKU	Packing Type	Container Size
702-10004E	Squeeze Bottle	4 oz
702-10016E	Squeeze Bottle with Spout	16 oz
702-10128E	Jug	1 gal



Jump Start® Starting Fluids with Lubricity

Features:

- Re-start your engine in both cold and humid conditions.
- Specially formulated to work and withstand even the harshest winter weather, in freezing temperatures as low as -65° F.
- Can be used on diesel engines and gas engines, making it economical and versatile.
- Can also be used on other carburetor fuel systems as well, including snow blowers, lawn mowers, and motorcycles.
- Lubricates upper cylinders.



SKU	Container Size
125-05671	11 wt oz

Grease



White Lithium Greases

Features:

- Superior lubrication and durability in any weather or temperature.
- Perfect for use as a break-in lubricant for bearings or as a general purpose lubricant and corrosion inhibitor for tools, machinery, and equipment.
- Tough, high viscosity film.

NLGI Grade: 2

Temp. Range: 0° F - 300° F

Flash Point: 0° F

Thickener: Lithium



SKU	Capacity Vol.
125-03080	16 oz



Automotive Lubricants

Features:

- A smooth light-bodied grease made especially for motor assembly.
- Prevents "Dry-Start".
- Provides lubrication during the initial start up before the motor oil has circulated.
- Protects freshly machined engine parts from rust and corrosion.

NLGI Grade: 0

Flash Point: 182 °C

Thickener: Calcium



SKU	Capacity Vol.
293-L0034-094	10 oz



JT-6® Hi-Temp Grease

Features:

- Formulated with a high dropping point for use over a wide temperature range.
- Provides excellent protection in severe service and outstanding shock load protection.

Packing Type: Tube

NLGI Grade: 2

Temp. Range: -10° F - 325° F

Flash Point: >302 °F

Thickener: Lithium Complex



SKU	Capacity Vol.
122-665005002080	14 oz

JT-6® Multi-Purpose Grease

Features:

- Waterproof and highly water wash resistant.
- Excellent extreme pressure properties.
- Prevents against shock loading.
- Outstanding rust and corrosion prevention.
- Very low oil separation rate.
- Light colored and low staining.
- Good oxidation resistance.

Packing Type: Cartridge

NLGI Grade: 2

Temp. Range: 0° F - 250° F

Flash Point: >302° F

Thickener: Anhydrous Calcium



SKU	Capacity Vol.
122-665006002080	14 oz

Grease Guns



Lever Type Heavy-Duty Grease Guns

Features:

- Flip-over follower is set for cartridge use.
- Extra-heavy follower spring insures positive priming and uninterrupted pumping action.

Outlet Type: 6 in Extension/Coupler

Designated Fluid: Grease



SKU	Capacity Vol.	Operating Pressure
438-1142	16 oz	6000 psi



Pistol Grip Heavy-Duty Grease Guns

Features:

- Rugged cast pump head for strength and durability.
- Jam-proof toggle mechanism prevents binding or accidental bending of plunger.
- Exclusive "Flip-Over" follower allows a superior seal for either cartridge or bulk loading applications.
- Tough, resilient and impervious to lubricant.
- Extra-heavy follower spring insures positive priming and uninterrupted pumping action.
- Accessible check valve allows easy cleaning without gun disassembly.
- Precision fit and hardened plunger prevents lubricant bypass, resists scoring for longer life.
- Follower rod locks into follower to force prime.

Outlet Size: 1/8 in

Outlet Type: 18 in Whip Hose/Coupler

Designated Fluid: Grease



SKU	Capacity Vol.	Operating Pressure
438-1133	16 oz	7500 psi

Multi-Purpose Lubricants



1® Premium Lubricants

Features:

- Provides a dry, thin, lubricating film.
- Resists oil, dust, and dirt build-up.
- Ideal for delicate mechanisms.
- Removes carbon build-up from surfaces.
- Displaces moisture.
- Safe on paint, fabric, and most plastics.
- Used world-wide in aviation.
- VOC compliant in all 50 states.

Packing Type: Aerosol Can

Flash Point: 174.2 °F (79.0 °C)

Chemical Compound: Petroleum



SKU	Capacity Vol.
428-00116	11 oz



2[®] Industrial-Strength Lubricants

Features:

- Strong, multi-purpose lubricant, and penetrant.
- Provides a non-drying, light, oily film for use on indoor equipment.
- Reduces wear caused by friction and corrosion.
- Loosens rusted or frozen parts.
- Strong, multi-purpose lubricant and penetrant with added corrosion protection.
- No Chlorinated Solvents

Packing Type: Aerosol Can

Flash Point: 174.2 °F (79.0 °C)

Chemical Compound: Petroleum Distillates



SKU	Capacity Vol.
428-00216	11 oz

Oils



Kroil Penetrating Oils

Features:

- Kroil quickly loosens rusted nuts and bolts, frees frozen shafts, pulleys, and more.
- Will not attack or damage metals.
- Penetrates quicker and deeper than similar products.
- Use on any corroded threads or tight parts.

Packing Type: Aerosol Can

Temp. Range: - 122° F

Flash Point: 132° F



SKU	Capacity Vol.
885-KS102C	10 oz
885-KS132C	13 oz
885-KS162C	16.5 oz



Marvel[®] Air Tool Oils

Features:

- Specially formulated for use in all piston type and rotary air tools, as well as in-line air lubricators.
- Prevents rust formation while providing positive lubrication for smooth starting and longer tool life.
- Assures maximum performance by dissolving gum and sludge that cut down tool speed and reduce power output.

Packing Type: Bottle



SKU	Capacity Vol.
465-080	4 oz
465-MM085R1	32 oz



Marvel[®] Mystery Oil Gas and Oil Additives

Features:

- Engine and fuel additive helps prevent oil breakdown caused by extreme temperatures.
- Reduces and prevents valve-sticking by removing harmful sludge and carbon deposits.
- Added to fuel, it helps improve mileage by reducing deposits on injectors and carburetor jets.

Packing Type: Plastic Bottle

Flash Point: 128° F



SKU	Capacity Vol.
465-013R	1 qt
465-MM14R	128 oz



Thread Cutting Oils

Features:

- Cools threads and pipe during operation.
- Speeds metal removal.
- Improves thread quality.
- Reduces threading torque.
- Free of chlorine and other halogens, PCBs and heavy metals (complete MSDS available).

Packing Type: Jug

Flash Point: 385° F



SKU	Color	Container Size
632-70830	Dark	1 gal
632-70835	Clear	1 gal



Multi-Purpose Lubricants

Features:

- Lubricating ingredients are widely dispersed and hold firmly to all moving parts.
- Dissolves adhesives, allowing easy removal of labels, tape, stickers, and excess bonding material.
- Protects metal surfaces with corrosion-resistant ingredients to shield against moisture and other corrosive elements.
- Loosens rust-to-metal bonds and frees stuck, frozen or rusted metal parts.
- Product displaces moisture quickly and dries out electrical systems to eliminate moisture-induced short circuits.

Temp. Range: -50 °F - 300 °F



SKU	Capacity Vol.	Packing Type	Flash Point
780-490040	11 oz	Aerosol Can	131 °F
780-490057	12 oz	Aerosol Can	131 °F
780-490088	16 oz	Aerosol Can	122° F
780-490118	1 gal	Canister	122 °F
780-49012	5 gal	Pail	122 °F

Silicone Lubricants



Food Grade Silicone Lubricants

Features:

- Harmless to Most Rubbers and Plastics.
- Wide effective temperature range .
- Excellent release agent and lubricant for all surfaces.
- Convenient 360° spray valve - can be sprayed from any position.

Temp. Range: -40 °F - 400° F

Packing Type: Aerosol Can



SKU	Capacity Wt.
125-03040	10 oz

PAINT & PAINT SUPPLIES

Paint Brushes



Acid Brushes


Features:

- Lightweight and disposable brush.
- Convenient for cleaning electrical contact points or debris in hard-to-reach spaces.
- Features tin shaft with horsehair bristles.

Trim Length: 3/4 in

Bristle Material: Black Horsehair

Handle Material: Tin Ferrule



SKU	Brush Width	Thickness
102-BW-180	3/8 in	1/4 in
102-BW-181	1/2 in	1/4 in
102-AB-26	5/16 in	1/4 in



White Chinese Bristle Paint Brushes

Features:

- Natural wood finish handle with White Chinese bristles.
- Steel ferrule.
- Perfect for latex paints, chip, and touch-ups.

Trim Length: 1-1/2 in

Bristle Material: White Chinese

Handle Material: Wood



SKU	Brush Width	Thickness
449-1500-1	1 in	5/16 in
449-1500-2	2 in	5/16 in
449-1500-3	3 in	3/8 in

Paints



INDUSTRIAL

Interior/Exterior Industrial Maintenance Paints

Features:

- VOC-compliant acrylic lacquer formula, free of lead hazards.
- Hard, protective, durable finish.
- High amount of solids assures maximum coverage with excellent adhesion.
- Dries fast, in just 12 minutes to the touch.
- Tough, high-gloss finish.
- Uniform coverage.
- No recoat window, recoat anytime.

Application Temp. Range: 50° F - 90° F

Dry Heat Resistance: 200° F



SKU	Capacity Vol.	Color
425-K01601A07	12 oz	Glossy Black



7649™ Primer N™

Features:

- A solvent-based primer that features very long on-part life of 30 days.
- Use to speed the cure of all Loctite® brand anaerobic products and ensure proper cure on inactive metals.
- Ideal for cure conditions below room temperature.
- Dries in 30 - 70 seconds.



SKU	Capacity Vol.
442-209715	4.5 oz



High Performance V2100 System Enamel Spray Paints

Features:

- High-output tip covers 50% faster.
- Dries to the touch in 20 minutes.
- Withstands heat to 200°F.
- Tough, professional finish that resists chipping, cracking and peeling.
- Meets USDA requirements for incidental food contact; accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide.

Application Temp. Range: 50° F - 100° F

Dry Heat Resistance: 212° F



SKU	Capacity Vol.	Color
647-V2143838	15 oz	Safety Yellow
647-V2179838	15 oz	Gloss Black
647-V2192838	15 oz	Gloss White
647-V2182838	15 oz	Gray



Industrial Choice 1600 System Multi-Purpose Enamel Sprays

Features:

- Multi-purpose spray paint developed for everyday painting and industrial painting projects.
- Dries 12 minutes to the touch.
- High solids provides complete, even coverage.
- Durable finish, resists chipping, fading and peeling.

Application Temp. Range: 50° F - 100° F

Dry Heat Resistance: 212 °F



SKU	Capacity Vol.	Color
647-1644830	12 oz	OSHA Safety Yellow

SPECIALTY PRODUCTS

Finding Paste



Water Finding Pastes

Features:

- Golden brown turns red on contact.
- Gauges petroleum for water content, sulphuric acid, nitric acid, hydrochloric acid, ammonia, soap, salt, and other chloride solutions.

Capacity Wt.: 3 oz

SKU
460-KK01

Layout Fluids



Layout Fluids

Features:

- Prevents glare with a uniform, deep color.
- Dries in minutes.
- Lets you scribe sharp, clear precise lines.
- Reduces eyestrain.
- Translucent.
- Flexible, non-cracking, and non-chipping.



SKU	Capacity Vol.
253-80000	16 oz

BATTERIES

DURACELL®

Lithium Batteries

Features:

- This Duracell High Power Lithium battery is designed for use in household items like cameras, electronics, and more.
- Duracell High Power Lithium batteries provide durable value because they are guaranteed for 10 years in storage.
- Duracell High Power Lithium batteries are designed to provide long lasting, reliable power to your specialty devices.

Voltage: 3 V

Quantity: 1 per Pack




SKU	Batt. Size
243-DL2032BPK	2032

Procell® Batteries

Features:

- AA, AAA, C and D batteries are guaranteed for 7 years in storage, 9V batteries are guaranteed for 5 years in storage.
- Recommended for scheduled battery replacement programs.
- Economically packaged in bulk and individually date-coded for effective inventory management.

Battery Type: Non-Rechargeable Dry Cell Alkaline



SKU	Batt. Size	Voltage
243-PC2400BKD	AAA	1.5 V
243-PC1500BKD	AA	1.5 V
243-PC1400	C	1.5 V
243-PC1300	D	1.5 V
243-PC1604BKD	9.0 V	9V

Watch/Electronic Batteries

Features:

- Duracell's Silver Oxide Button batteries provide reliable, long lasting power for your medical devices, watches, toys, electronics and more.
- Duracell Silver Oxide Coin batteries are engineered for long lasting quality performance.
- Duracell Silver Oxide Button Batteries provide durable value because they are guaranteed for 4 years in storage.

Voltage: 1.5 V



SKU	Battery Type	Batt. Size
243-D303/357PK	Silver Oxide	357/303

Energizer

Industrial Alkaline Batteries



Features:

- Designed for industrial, professional use.
- Long-lasting power source.
- Batteries operate well in extreme conditions.
- Date-coded and 100% mercury-free.

Voltage: 1.5 V

Quantity: 24 per Pack

SKU	Batt. Size
827-EN92	AAA
827-EN91	AA

RAYOVAC

Lithium Keyless Entry Batteries



Features:

- Reliable, affordable and long-lasting power source.
- Provide high performance at a great price, keeping your specialty devices going strong.
- Commonly used in keyless remotes, car security systems, cameras, calculators, medical devices and more.

Voltage: 3.0 V

Quantity: 1 per Pack

SKU	Batt. Size
620-KECR2032-1G	CR2032

EXTENSION & POWER CORDS



Vinyl Extension Cords

Features:

- Vinyl jackets offer great abrasion, moisture and sunlight resistance.
- Molded plugs and heavy duty strain relief prolongs the life of the cord.
- Reinforced blades prevent bending and breaking.
- Outer jacket won't mark floors or walls.

No. of Outlets: 1

Conductor Size: 12/3 AWG

Amps: 15 A



SKU	Length	Voltage
172-02588-0002	50 ft	125 V
172-2589SW0002	100 ft	125 VAC

FLASHLIGHTS & LANTERNS



Stylus Pro® LED Pen Lights



Features:

- Sleek design fits in your pocket.
- IPX4 rated for water resistant operation, all openings o-ring sealed.
- One meter impact resistance tested.

Batt. Type: Alkaline

Beam Concentration (MBCP): 950 cd

Lumens: 100

Modes: On/Off

Run Time: Up to 8 h

Lamp Life: 30,000 h

Includes: Batteries; Nylon Holster; Removable Pocket Clip

SKU	No. of Batteries	Batt. Size
683-66118	2	AAA

STRAPPING PRODUCTS

Cable Ties



General Purpose Cable Ties

Features:

- Nylon 6/6 features light weight, high strength and a wide temperature range.
- Even at higher than recommended temperatures or exposure to flame, nylon does not give off toxic or irritating by-products.

Thickness: 0.054 in

Tensile Strength: 50 lb

Material: Nylon 6/6

SKU	Length	Width	Bundle Diam	Color
102-750N	7.6 in	0.18 in	2 in	Natural
102-1150VEL	11.1 in	0.18 in	3 in	Yellow

UV Stabilized Cable Ties



Features:

- General purpose use.
- Nylon 6/6 features light weight, high strength and a wide temperature range.
- Contains increased resistance to UV light (does not totally eliminate the destructive effects of the light).

Material: Nylon 6/6

SKU	Length	Width	Thickness	Tensile Strength	Bundle Diam
102-750UVB	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-1150UVB	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1150UVB-B	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1450UVB	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-15120UVB	15 in	0.298 in	0.069 in	120 lb	4 in



Heavy-Duty Cable Ties

Features:

- DoubleLock™ design has teeth on both sides of the tie.
- Durable nylon construction.

Color: Ultraviolet Black

Material: Nylon 6/6



SKU	Length	Width	Thickness	Tensile Strength	Bundle Diam
623-46-415UVB	15 in	0.25 in	0.072 in	120 lb	4 in
623-46-418UVB	18 in	0.35 in	0.07 in	175 lb	4.9 in
623-46-424UVB	24 in	0.35 in	0.07 in	175 lb	7 in

Standard Cable Ties

Features:

- Patented DoubleLock™ design has teeth on both sides of the tie, ensuring 50% greater strength than industry standards.
- Made from durable 6/6 nylon material.
- Serviceable through temperatures of 32° - 185° F.

Thickness: 0.055 in

Tensile Strength: 75 lb

Color: Ultraviolet Black

Material: Nylon 6/6



SKU	Length	Width	Bundle Diam
623-46-308UVB	8 in	0.17 in	2 in
623-46-310UVB	11 in	0.17 in	3 in

COOLERS & CHESTS



400 Series Coolers

Features:

- Ultratherm® insulation for maximum cold retention and maintains ice for up to 3 days in temperatures as high as 90°F.
- HDPE hide won't chip, peel, buckle, or rust.
- UV stabilizers prevent fading, cracking in all exposures.
- Front push-button spigot is drip-resistant.
- White FDA Grade liner is easy-to-clean and resists stains and odors.
- Wide mouth pressure fit lid for easy filling.
- Keeper cord prevents lid loss.



SKU	Width	Height
385-4101	15-7/8 in	23-1/4 in
385-431	13-1/2 in	14 in
385-451	13 in	20.38 in



Seat Top Water Jugs

Features:

- Cup dispenser delivers refreshment at your fingertips.
- Ultratherm® insulation in body and lid keeps ice frozen.
- Push-button spigot is recessed and angled spigot for easy, leak-free dispensing.
- Sturdy, reinforced handles stand up to heavy loads.
- Cord tether keeps lid from getting lost or dirty.
- Sleek, pressure-fit lid cleans easily and won't trap dirt or mold.



SKU	Width	Height
385-42316	13 in	19.5

CLAMPS & VISES

Clamps & Spreaders



Drop Forged C-Clamps

Features:

- Extra throat depth.
- Non-slip clamping on all shapes.
- Steel spindles are copper plated for spatter protection.
- Swivel pads adjust freely to bear evenly on clamped part.
- Individually boxed for easy storage and protection.

Spindle Dia: 3/4 in

Body Material: Drop Forged Steel

Handle Type: Sliding Pin

Handle Material: Steel



SKU	Opening Size	Overall Length	Throat Depth	Pressure
102-404C	3-1/4 in	4 in	3-1/4 in	6,200 lb
102-406C	6-1/16 in	6 in	4-1/8 in	6,900 lb
102-408C	8-1/4 in	8 in	5 in	6,600 lb



Locking C-Clamps with Swivel Pads



Features:

- Wide-opening jaws provide greater versatility.
- Swivel pads hold tapered work, awkward fabricating jobs, and delicate projects.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Guarded release trigger quickly unlocks and protects from accidental release.

SKU	Throat Depth	Overall Length
586-11SP	2-5/8 in	11 in

The Original™ Locking C-Clamps with Regular Tips



Features:

- Wide-opening jaws provide greater versatility in clamping a variety of shapes.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Classic trigger release designed to provide maximum locking force.

Pressure: Adjustable Turn Screw

Body Material: Heat-Treated Alloy Steel

Handle Type: Vise-Grip Release

Handle Material: Heat-Treated Alloy Steel

SKU	Opening Size	Overall Length	Throat Depth
586-11R	4 in	11 in	2-5/8 in
586-18R	8 in	18 in	9-1/2 in
586-6R	2-1/8 in	6 in	1-1/2 in

Vises



Mechanics Vises



Features:

- Swivel base rotates 360 degrees and has double lockdowns ensuring maximum stability.
- Powder coat paint resists scratches and provides a tough durable finish.
- Replaceable hardened steel top and pipe jaws.
- Large anvil work surface.

Jaw Opening: 5-3/4 in

Throat Depth: 4-1/8 in

Pipe Jaw Cap.: 1/4 in - 3-1/2 in

Jaw Material: Steel

Material: Cast Iron

Finish: Powder Coated Paint

SKU	Base Type	Jaw Width
825-21500	Swivel	6 in



Tradesman Vises



Features:

- Large anvil surface.
- 60,000 PSI tensile ductile iron body parts.
- 360° swivel base with double lockdowns.
- Wider jaws provide greater clamping surface.
- Fully enclosed spindle increases the life of the vise.

Jaw Opening: 6 in

Throat Depth: 4 in

Pipe Jaw Cap.: 1/4 in - 3-1/2 in

Jaw Material: Steel

Material: Cast Iron

Finish: Powder Coated

SKU	Base Type	Jaw Width
825-28807	Swivel	6-1/2 in



Top Screw Bench Chain Vises



Features:

- Rugged cast-iron base has handy pipe rest and bender.
- Crank handle is anchored to base.

SKU	Pipe Cap.	Material
632-40195	1/8 in - 4 in	Cast Iron Base with Anchored Crank Handle
632-40210	1/4 in - 6 in	Cast Iron Base with Anchored Crank Handle

TRISTAND® Portable Chain Vises



Features:

- Optimized base for more working area.
- Benders are located at the rear of the base and three tool hangers are provided.
- Integrated ground lug provides a conductive surface to connect the weld ground.
- Leg chain retains legs even when subjected to rugged use during operation and transport.
- Rugged tool tray offers prolonged stability before requiring a leg adjustment.

SKU	Pipe Cap.	Material
632-36273	1/8 in - 6 in	Ductile Iron Work Surface; Hardened Steel Jaws and Tubular Legs

EXTRACTORS & SETS

Extractor Sets



Extractor Sets

Features:

- Strong, heat-treated tool steel.
- Corresponding drill-bit size stamped on each tool.
- Corrosion-resistant finish.

Quantity: 10 per set

Wt.: 4.5 lb

SKU	Extractor Screw Diam.	Includes
577-9500B	1/8 in; 3/16 in; 7/32 in; 5/16 in; 3/8 in; 7/16 in; 17/32 in; 5/8 in; 3/4 in; 1 in	Blow Molded Box

FILES

Half Round Files



Half-Round Files

Features:

- Used on concave, convex and flat surfaces.
- Rounded on one side, flat on opposite.
- Backs of all half-round bastard files are double-cut.
- Backs of all half-round second-cut files are longer than 6 in are double-cut.

Tooth Pattern: Curved - Single Cut; Flat - Single Cut

Tool Shape: Straight

Style: Pipeliner File; American Pattern

SKU	Cut Type	Length
183-05190N	Double-Cut Bastard	14 in

HAMMERS, SLEDGES, MALLETS & AXES

Hammers



Chipping Hammers

Features:

- Hammer heads are hardened to precisely controlled temperatures for durability and strength.
- Wide-blade design removes slag faster and adds to the life of the tool.
- Drop forged, heat-treated, hardened head withstands more grinds.
- Well balanced handle grip for comfort and ease-of-use.

Handle Material: Steel

Head Material: Forged Steel

Head Length: 6 in

SKU	Overall Length	Handle Type
900-CH-200	11 in	Spring



COMPO-CAST® Standard Soft-Face Hammers

Features:

- Uni-Cast™ construction of non-ferrous materials eliminates sparking and won't absorb liquids.
- No exposed metal on face, head, or shaft.
- Dead blow function eliminates bounceback when striking hardened surfaces.
- Soft face helps prevent marring.
- Steel reinforced handle provides strength and resists breaking on overstrike.

SKU	Head Weight	Head Material	Face Diam	Head Length
680-57-532	21 oz	Polyurethane Over Steel	2 in	4-1/4 in
680-57-533	42 oz	Polyurethane Over Steel	2-15/32 in	4-3/4 in



Toughstrike American Hickory Engineer Hammers

Features:

- Double-face forged steel hammer head for maximum durability.
- Wedge/ring connection for trusted head retention.
- Used for heavy hammering, light demolition work, and driving spikes/wedges.

Grip Style: Bare Wood

Handle Material: American Hickory

SKU	Head Weight	Handle Length
027-20184300	3 lb	15 in
027-20184600	4 lb	15 in

TRUE TEMPER

Toughstrike American Hickory Sledge Hammers

Features:

- American hickory handle reduces shock.
- Double-face forged steel hammer head for maximum durability.
- Overstrike protection to prevent handle breakage.
- Wedge/ring connection for trusted head retention.
- Used for heavy demolition work and driving spikes/wedges.

Handle Material: American Hickory

SKU	Head Weight	Handle Length
027-20184800	6 lb	36 in
027-20185000	8 lb	36 in
027-20185200	10 lb	36 in

Toughstrike Fiberglass Engineer Hammers

**Features:**

- Fiberglass handle for increased handle strength.
- Double-face forged steel hammer head for maximum durability.
- Overstrike protection to prevent handle breakage.
- Epoxy connection for trusted head retention.
- Used for heavy hammering, light demolition work, and driving spikes/wedges.

Handle Material: Fiberglass

SKU	Head Weight	Handle Length
027-20184200	3 lb	15 in
027-20184500	4 lb	15 in



B.A.S.H.® Unbreakable™ Handle Sledge Hammers

Features:

- Unbreakable™ Technology—steel core eliminates breaking during overstrikes.
- Safety Plate—secures head to handle preventing head dislodging.
- Ergonomic Handle—shaped and thickened for improved comfort and less vibration.
- Non-Slip Grip—vulcanized rubber handle for secure grip while striking.
- Lanyard Hole—safely secure hammer to wrist or stationary object.

Handle Type: Ergonomic and Unbreakable™**Grip Style:** No-Slip Rubber Grip**Handle Material:** Vulcanized Rubber; Steel

SKU	Head Weight	Handle Length
825-20412	4 lb	12 in

HAND TOOL ORGANIZERS & BELTS

Tool Pouches & Holders



Leather Holsters

**Features:**

- Genuine leather holster, keeps pliers safe and handy.
- Protects pliers tips.
- Prevents wear and tear.

Width: 3-1/2 in**Height:** 10-1/2 in

SKU	Material	No. of Compartments
900-BW-50-HOLSTER	Leather	1

HEX, TORX & SPLINE KEYS

Hex Key Sets



Ball End L-Wrench Sets

Features:

- Angle entry to 25° for faster insertion and removal of screws.
- Works in hard to reach areas.

Tip Type: Ball End; Hex**Finish:** ProGuard™ Finish

SKU	Tip Size	Measuring System	Includes
116-10937	0.050 in to 3/8 in	SAE	0.050 in; 1/16 in; 5/64 in; 3/32 in; 7/64 in; 1/8 in; 9/64 in; 5/32 in; 3/16 in; 7/32 in; 1/4 in; 5/16 in; 3/8 in; Holder
116-10999	1.5 mm to 10 mm	Metric	1.5 mm; 2 mm; 2.5 mm; 3 mm; 4 mm; 5 mm; 6 mm; 8 mm; 10 mm; Holder



Ball-Hex-L™ Key Sets

Features:

- Made with Eklind® alloy steel.
- Heat treated for optimum strength and ductility.
- Finished with Eklind® Black Finish to resist rust.

Tip Type: Hex Ball**Includes:** Plastic Holder**Quantity:** 13 per set

SKU	Tip Size	Measuring System
269-13213	0.05 in; 1/16 in; 5/64 in; 3/32 in; 7/64 in; 1/8 in; 9/64 in; 5/32 in; 3/16 in; 7/32 in; 1/4 in; 5/16 in; 3/8 in	Inch

KNIVES & MULTI-PURPOSE TOOLS

Knife Blades



Blade Dispenser Containers

Features:

- Dispenses one blade at a time.
- Fits most utility knives.

No. of Cutting Edges: 1Wt.: 0 lb



SKU	Blade Shape	Blade Tip Shape
102-AB-11-100	Trapezoid	Straight Edge

STANLEY



Heavy Duty Utility Blades

Features:

- Fits most standard utility knives.
- Precision honed edge.
- 0.025 in Blade thickness.

No. of Cutting Edges: 1

SKU	Blade Shape	Blade Tip Shape	Quantity
680-11-921	Trapezoid	Triangular Point	5 per Card
680-11-921A	Trapezoid	Triangular Point	100 Pk. with Dispenser

Single-Edge Razor Blades

Features:

- For all standard razor blade tools.
- Steel backed high-carbon steel blade.

No. of Cutting Edges: 1



SKU	Blade Shape	Blade Tip Shape
680-11-515	Rectangular	Single Edge

Knives



Retractable Blade Utility Knives

Features:

- Features a multi-stop button and retractable blade to help minimize injuries in the workplace.
- Used with Anchor Brand replacement blades AB-11-100.

Handle Material: Zinc Alloy

Handle Type: Straight

Includes: Five blades 102-AB-11-100

Height: 1.25 in

Width: 1-3/4 in



SKU	Handle Length	Overall Length
102-AB-99	6 in	7 in

STANLEY



Classic 99® Retractable Utility Knives

Features:

- Pro-grade, carbon alloy steel blade is built for durability and long-term reliability.
- Interlocking nose tightly holds knife edge in place.
- Choose between 3 different positions for best use.
- Storage space for up to 10 additional blades in handle.

Handle Material: Metal

Handle Type: Straight

Includes: (3) 11-921 1992® Heavy-Duty Blades

SKU	Overall Length
680-10-099	6 in



QuickChange™ Retractable Utility Knives

Features:

- Change blades quickly without a screwdriver.
- Three position retractable blade slide.
- Swing-out blade storage magazine.
- Integrated string cutter for use even when blade is retracted.

Handle Material: Metal

Handle Type: Straight

Includes: (3) 11-921 1992® Heavy-Duty Blades

SKU	Handle Length	Overall Length
680-10-499	6 in	6-3/8 in

RAZOR-BACK[®]

PROFESSIONAL TOOLS

THE RECOGNIZED LEADER IN PROFESSIONAL JOB SITE TOOLS

Since 1936, Razor-Back Professional Tools have been in the hands that tackle the toughest jobs known to man.



WHEN SAFETY MATTERS

Steel-anchored core for maximum security and head retention.



ARMOR D-GRIP

Built for heavy jobs, steel encases hardwood and prevents twisting.



BUILT TO LAST

Strong tempered, industrial-gauge steel.



MADE TOUGH

One-piece forged steel head, steel ferrules for long life.

LIMITED LIFETIME WARRANTY



STANLEY



Self-Retracting Utility Knives

Features:

- Spring-loaded blade retracts into knife automatically when pressure on slide button is released.
- Knife can't be left around or put in a pocket with the blade exposed.
- INTERLOCK® nose secures blade safely between knife halves.

Handle Material: Carbon Steel

Handle Type: Contoured

Includes: (1) 11-987 Blade

Height: 3/4 in

Width: 1-5/16 in

SKU	Handle Length	Overall Length
680-10-189C	5-7/8 in	5-7/8 in

LAWN & GARDEN TOOLS

Shovels & Spades

RAZOR-BACK®
PROFESSIONAL TOOLS

Round Point Digging Shovels

Features:

- This round point shovel is tough enough to dig in the hardest, rockiest soil.
- Features a heavy-duty steel blade.

Blade Type: Forward-Turned Step; Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Blade Thickness: 14 ga

Socket Length: 11 in



SKU	Blade Length	Blade Width
760-45520	12 in	9.5 in

Square Point Transfer Shovels

Features:

- Strength and durability make RAZOR-BACK® tools the choice of professionals.
- It's perfect for moving loose garden material, sand, top soil or debris.
- It can also be used to shape beds, mix concrete, level off areas that need to be flat or to scrape stubborn material off driveways or other hard surfaces.

Blade Type: Open-Back; Rolled-Step

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Blade Thickness: 14 ga

Socket Length: Dual Rivet Extended Tab



SKU	Blade Length	Blade Width
760-44101	12 in	9.5 in

TRUE TEMPER®

Aluminum Scoop with Hardwood Handle

Features:

- Durable and lightweight scoop is ideal for snow removal.
- Features a D-Grip handle for optimum lift and leverage.
- Excellent for lifting loose and bulky materials.

Blade Type: Ribbed

Blade No.: #12

Handle Type: D-Grip

Handle Material: Hardwood; Plastic

Blade Material: Aluminum

Blade Thickness: 0.076 in



SKU	Blade Length	Blade Width
027-2681200	18 in	15.25 in

Eagle™ Shovels

Features:

- Steel collar for added strength at the handle/socket connection.
- Lightweight fiberglass handle resists splintering, cracking, and weathering.

Blade Type: Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: White Ash

Blade Material: Steel



SKU	Blade Length	Blade Width
027-1554300	11 in	8-1/4 in
027-1554500	10-1/2 in	9 in

Poly Scoops with Hardwood Handle

Features:

- This poly scoop is perfect for moving and scooping grain, seed, feed, fertilizers, and other granulated materials.
- It's also a useful and versatile garden tool.
- Sturdy enough for general clean-up or for moving mulch, soil, or even snow.

Blade Type: Scoop

Blade No.: #12

Handle Type: D-Grip

Handle Material: Hardwood; Steel

Blade Material: Poly



SKU	Blade Length	Blade Width
027-2604300	18 in	14.37 in

Round Point Shovels

Features:

- Dura-Torque® crimp collar for super-strong head-to-handle connection.
- This shovel is of good quality and designed for light-to medium-duty jobs or for occasional users.
- Heavy duty blade.
- Ash Handle.

Blade Type: Forward Turned-Step; Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: Hardwood

Blade Material: Steel

Socket Length: 9 in



SKU	Blade Length	Blade Width
760-40191	11.5 in	9.25 in

Square Point Transfer Shovels

Features:

- Perfect for moving loose garden material, sand, top soil, or debris.
- Can also be used to shape beds, mix concrete, level off areas that need to be flat, or to scrape stubborn material off driveways or other hard surfaces.

Blade Type: Forward Turned-Step; Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Socket Length: 9 in



SKU	Blade Length	Blade Width
760-40184	11.5 in	9.25 in

Sprayers



3.5 gal Industrial Concrete Open Head Sprayers

Features:

- Tri-Poxy lined steel tank provides triple protection against rust, corrosion and damage from denting.
- Featuring a large 4 in-wide mouth opening for easy filling and cleaning.
- Chemical-resistant seals and gaskets designed to handle a variety of chemicals.
- Brass pump, wand, nozzle and shut-off with lock-on feature.
- Reinforced hose with thread fittings.

Operating Pressure: 40 to 60 psi

Extension Type: Brass Wand

Hose Length: 48 in

Pump Type: Piston with Chemical-Resistant Seals and Gaskets

Handle Type: Tri-Lock Cap; Ergo

Nozzle Type: Brass Fan-Tip

Body Material: Tri-Poxy® Steel

Includes: Tank; Brass Wand; Reinforced Hose

Wt.: 11 lb



SKU	Capacity Vol.	Extension Length
139-1949	3-1/2 gal	24 in

Lawn and Garden Sprayers

Features:

- Ideal for weed control, pest control and fertilizers.
- Features Chapin's unique in-tank anti-clog filter, for a clog-free, steady spray.
- Ergonomic pump handle makes pumping and carrying easy.
- Lightweight, rust-free polyethylene tank is translucent so it's easy to check fluid levels.

Operating Pressure: 45 psi

Extension Type: Straight Poly Wand

Hose Length: 34 in

Pump Type: Universal PL Nitrile

Handle Type: Poly Shut-Off Assembly

Nozzle Type: Poly Adjustable Cone Nozzle

Body Material: Polyethylene

Includes: Sprayer; Wand

Wt.: 3.5 lb



SKU	Capacity Vol.	Extension Length
139-20002	2 gal	18 in

Water Hoses



Pro-Flow™ Commercial Duty Hoses



Features:

- Octagonal heavy-duty crushproof couplings.
- Continuous flow tube keeps water flowing even if kinked.
- Metal spring collar prevents kinking at faucet.
- Anti-bacterial lining prevents deterioration and extends hose life.

Operating Pressure: 450 psi

Reinforcement: PVC

SKU	Inside Diam	Length
027-4003600	5/8 in	50 ft

Wheelbarrows



Steel Wheelbarrow

Features:

- Ideal for homeowners, landscapers, and light construction work.
- The seamless steel tray is plenty tough and will provide years of service.

Wheel Type: Never Flat Tire

Handle Length: 58.75 in

Frame Material: Steel

No. of Wheels: 1

Handle Material: Hardwood

SKU	Capacity Vol.	Tray Type
027-R6FF25	6 cu ft	Seamless Steel

MULTI-PURPOSE HAND TOOL SETS

Multi-Purpose Tool Sets



1/4 in and 3/8 in Drive 6-Pt SAE/Metric Professional Tool Sets

Features:

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical, and consumer applications.
- Incredible access from long wrenches with narrow heads, adjustable wrenches and pliers, and a long-beam ratchets with small teardrop heads.
- Long nose and diagonal pliers with professional, ergonomic dipped grips wipe clean easily.
- Co-molded bit driver and screwdriver handles with ergonomic grip for improved performance.
- Shallow and deep SAE/metric 6-point full polish chrome sockets with stamped size markings for easy socket identification.
- 6 inch adjustable wrench with hex jaw design reduces slippage by gripping fasteners tightly.
- Manufactured from chrome alloy steel for better strength and longer tool life.
- Includes blow mold case for storage and organization.

Quantity: 180 pc

SKU	Includes	Drive Size
181-CTK180	(2) Ratchets; (3) Extensions Adapter; (51) Standard Sockets; (31) Deep Sockets Spark Plug Socket; (12) Combination Wrenches; (24) Hex Keys; (2) Pliers Adjustable Wrench; (4) Screwdrivers Magnetic Bit Driver; (46) Bits; Bit Adapter	1/4 in; 3/8 in

PIPE THREADING EQUIPMENT

Threaders Powered



Model 300 Power Drive Threading Machines

Features:

- Cam-action rear centering device turns with chuck.
- Two heavy-duty support bars.
- Speed grip chuck with replaceable jaw inserts.
- Forward/Off/Reverse switch and integral On/Off foot switch.
- Lightweight, portable design.
- Self-contained oil system with adjustable flow control.
- Ideal for use with RIDGID® roll groovers.

Speed: 36 RPM

Amps: 15 A

Power Cap.: 1/2 hp

Phase: Single

Includes: (1) 300PD, Tool Only, 115V 25-60Hz 38 RPM NPT (41855); ; (1) 300PD Clip-On Tool Tray (22638); (1) 811A 1/8 in to 2 in NPT Die Head, Self-Opening, RH (97065); (1) 1/2 in to 3/4 in Universal Alloy Die Set (47745); (1) 1 in to 2 in Universal Alloy Die Set (47750); (1) 360 Cutter Assy (42370); (1) 311 Carriage with Lever (68815); (1) #32 Transport Cart (42575); (1) 341 Reamer Assy (42365); (1) 1206 Stand (42360); (1) Oiler with One Gallon Premium Thread Cutting Oil (10883)



SKU	Pipe Cap.	Voltage
632-15682	1/8 in - 2 in	115 V AC

Model 700 Power Drive/ Hand Held Threaders

Features:

- Heavy-duty hand-held power drive.
- Designed for RIDGID® Model 12-R die heads.
- Other RIDGID® die heads (00-R, 00-RB, 11-R) can be used using adapters.
- It can also be used with 258/258XL pipe cutters.
- Double-throw reversible switch.
- Spur gear reduction face gear drive, spring-loaded adapter pawls, and hardened steel spindle gear.
- Cast aluminum body.

Speed: 36 RPM

Amps: 13 A

Power Cap.: 1/2 hp

Phase: Single Phase; Universal

Includes: 700 Power Drive; Die Head/Dies Sold Separately



SKU	Pipe Cap.	Voltage
632-41935	1/8 in - 2 in	115 V

Threaders Powered Accessories



Pipe Dies for Machine Die Heads

Features:

- Strong and durable pipe dies for use in universal die heads.
- Applicable to a wide variety of die heads.
- A convenient replacement to keep systems functioning for longer.

Pipe Cap.: 1 in - 2 in



SKU	For Model	Type
632-47770	Universal Die Heads Nos 504A/711/713/811A/815A/816/817/842	High-Speed RH

V-Head Pipe Stands

Features:

- V Head pipe stand.
- Locking ring allows for quick vertical height adjustments.
- Durable steel construction.

Pipe Cap.: Up to 12 in

Wt. Cap.: 2500 lb



SKU	Height Adjustment
632-56662	28 in - 53 in

PLIERS & CUTTERS

Bolt & Chain Cutters



Heavy-Duty Bolt Cutters

Features:

- Hardened alloy steel jaws are designed and manufactured to assure the longest possible blade life.
- One-step internal cam mechanism provides the quickest and simplest way to keep the cutting blades precisely aligned.
- Handles and grips designed to allow greater mechanical advantage for crisp, controlled cutting.

Overall Length: 26 in

Cut Type: Center Cut

Jaw Material: Alloy Steel

Handle Type: Straight

Handle Material: Steel



SKU	Cutting Cap.	Hardness
632-14223	Soft 7/16 in; Medium 3/8 in; Hard 5/16 in	Soft (15RC)1; Medium (31RC)2; Hard (42RC)3

Linemans Pliers



Lineman's High-Leverage Pliers

Features:

- Hot-riveted joint ensures smooth action and no handle wobble.
- Induction hardened cutting knives for long life.
- Streamlined design with sure-gripping, cross-hatched knurled jaws.
- Unique handle tempering helps absorb the snap when cutting wire.
- Precision-hardened plier head for on-the-job toughness.
- Handform handles for full gripping and cutting power.

Jaw Length: 1.594 in

Jaw Width: 1.25 in

Material: Steel

SKU	Overall Length	Cutting Length
409-D213-9NE	9.33 in	0.797 in

Locking Pliers



Locking Chain Clamps

Features:

- Chain holds and locks around any shape or size.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Guarded release trigger quickly unlocks and protects from accidental release.
- Replacement chain available and sold separately.

Material: High-Grade Heat Treated Alloy Steel

Chain Length: 18 in

SKU	Jaw Opening	Overall Length
586-20R	18 in	9 in

Locking Sheet Metal Clamps



Features:

- Locks to work, eliminates hand gripping.
- Makes bending, forming and crimping jobs easier.

Throat Depth: 1-3/4 in

Material: Alloy Steel

SKU	Jaw Opening	Overall Length
586-23	3-1/8 in	8 in



Long Nose Locking Pliers

Features:

- Convenient wire cutter cuts up to a 1/4 in bolt.
- Long, straight nose allows for use in narrow spaces not reachable by curved or straight jaws.
- Use to clamp or tighten bolts or to extract items in hard-to-reach places.

Material: High-Grade Heat-Treated Alloy Steel

SKU	Jaw Opening	Overall Length	Throat Depth
586-6LN-3	2-1/4 in	6 in	2 in
586-9LN-3	2-7/8 in	9 in	2-2/32 in



VISE-GRIP® Straight Jaw Locking Pliers

Features:

- Straight jaws provide maximum contact on flat, square, or hex work.
- Ideal for tightening, clamping, twisting and turning.

Material: Alloy Steel

SKU	Jaw Opening	Overall Length	Throat Depth
586-302L3	1-1/8 in	7 in	1-1/2 in
586-10R-3	1-5/8 in	10 in	1-3/4 in



VISE-GRIP® The Original™ Curved Jaw Locking Pliers with Wire Cutters

Features:

- Curved jaw puts tremendous pressure on four points of any style nut or bolt head.
- Includes convenient wire cutter.
- Constructed of high-grade heat-treated alloy steel for maximum toughness and durability.
- Guarded release trigger quickly unlocks and protects from accidental release.
- Turn screw to adjust pressure and fit, stays adjusted for repetitive use.
- Hardened teeth are designed to grip from any angle.
- Hex key adjusting screw offers controlled release and draws materials tightly together.

Material: Alloy Steel

SKU	Jaw Opening	Overall Length	Throat Depth
586-7WR-3	1-5/8 in	7 in	1-3/4 in
586-10WR-3	1-7/8 in	10 in	2-5/8 in

Specialty Pliers



MIG Welding Pliers

Features:

- Strong, sharp welding pliers is a must tool for mig welding operations.
- Multipurpose tool with 8 functions resulting in more efficient time and production.
- Durable carbon steel construction paired with an easy to use spring operated handle.

Jaw Shape: Double-Edged

Material: Carbon Steel

SKU	Overall Length	Wire Diam
900-YS-50	21 cm	0.8 mm - 1.5 mm

Tongue & Groove Pliers



Tongue and Groove Pliers

Features:

- CHANNELLOCK BLUE® grips for comfort.
- Undercut tongue and groove design won't slip.
- Patented reinforcing edge minimizes stress breakage.
- PermaLock® fastener eliminates nut and bolt failure.

SKU	Overall Length	Jaw Opening	Jaw Length	Jaw Shape	No. of Adjustments
140-426-BULK	6.50 in	0.87 in	0.81 in	426 Straight	5
140-420-BULK	9.50 in	1.50 in	1.12 in	420® Straight	5
140-430-BULK	10 in	2 in	1.38 in	430® Straight	7
140-440-BULK	12 in	2.25 in	1.50 in	440® Straight	7
140-460-BULK	16.50 in	3.75 in	2.56 in	460 Straight	8

Tubing Cutters



Constant Swing Tubing Cutters

Features:

- Features an enclosed feed screw to eliminate clogging and jamming, grooved rollers for close-to-flare cuts, and a fold-away reamer.
- X-CEL® Knob cuts tubing more quickly and easily with a larger, more ergonomic design.
- X-CEL® Wheel Pin, ball detent design, allows users to change cutter wheel quickly, no tool needed.
- Spare cutter wheel included in the knob.
- Made from high-strength zinc alloy.
- Cuts copper, brass, aluminum tubing, and thin-wall conduit.

Cutting Cap.: 1/8 in - 1-1/8 in

Includes: Spare Cutter Wheel Stored in Knob


Cut Type: Wheel Cut

Handle Type: Screw Knob

SKU	Jaw Material	Blade Material
632-31622	Zinc Alloy	Steel

PRYING TOOLS

Bars

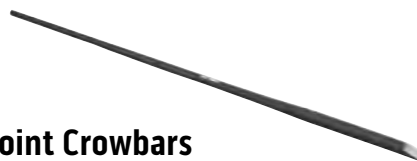

Pinch Point Crowbars

Features:

- Hardened, drop-forged steel construction.
- Heavy-duty tool for stubborn prying tasks and heavy lifting.
- Useful for breaking up hard surfaces.

Stock Size: 1-1/4 in

Tip Width: 1-1/4 in

Material: Heat Treated Carbon Steel

SKU	Wt.	Overall Length
027-1160100	18 lb	60 in

PUTTY KNIVES & SCRAPERS

Scrapers & Putty Knives



4200 Professional Series Putty Knives

Features:

- Comfort grip handles are shatterproof.
- Mirror-finished and lacquered to prevent rust and add life to blades.
- Solid steel nail setting head.

Blade Material: High-Carbon Steel

Handle Material: Black Nylon, Solvent Resistant



SKU	Blade Width	Overall Length
630-4205	2 in	7.75 in

SHEARS, SCISSORS & SNIPS

Shears & Scissors



Inlaid® Bent Handle Industrial Shears

Features:

- Hot drop-forged nickel-plated blades are strong and durable.
- Configure the SET-EASY® pivot adjustment to match your preference.
- Handle rings designed to comfortably fit users' hands.

Cut Type: Shear Cut

Material: High Carbon Steel

Finish: Nickel Plated Blade

Handle Type: Bent



SKU	Cutting Length	Overall Length
186-W20	4.75 in	10.375 in

Snips



MetalMaster® Snips

Features:

- Withstands strain of cutting heavy stock and tight curves.
- Spring-action for fast, effortless feed.
- Handy hang-up hole.
- Non-slip, textured grips and safety latch for superior control.

Cut Type: Aviation

Cutting Direction: Straight; Left-Cut; Right-Cut

Length: 9-3/4 in

Jaw Type: CNC-Ground Edges; Serrated

Jaw Material: Precision-Cast Molybdenum Steel

Handle Type: Ergonomic; Left-Hand; Right-Hand

Handle Material: Non-Slip Grips



SKU	Cutting Cap.	Cutting Length
186-M3R	Low-Carbon, Cold-Rolled 18 ga	1-1/2 in

WRENCHES

Adjustable Wrenches



Adjustable Wrenches

Features:

- Hardened and tempered.
- Precision machined jaws and knurled adjusting worm.
- Plated to resist rust.

Head Angle: 15°

Head Width: Varies

Head Thickness: Tapered

Handle Type: I-Beam

Material: Drop-Forged Alloy Steel

Finish: Chrome Plated



SKU	Opening Size	Overall Length
103-01-012	1-1/2 in	12 in



Adjustable Chrome Wrenches

Features:

- Wider knurl for easier adjustment.
- Laser etched scale provides a quick and convenient way to determine fastener size in either SAE or metric.
- Wide capacity jaw provides versatility to accommodate a greater size range of fasteners.
- Wider handle provides more comfort and less hand fatigue.

Head Angle: 22-1/2° +/- 5°

Material: Heat Treated Alloy Steel

Finish: Chrome Plated with Polished Head and Satin Finished Handle

SKU	Opening Size	Overall Length	Handle Type
181-AC212BK	1-1/2 in	12 in	Non-Cushioned
181-AC215BK	1-11/16 in	15 in	Non-Cushioned; Tapered
181-AC218BK	2-1/16 in	18 in	Non-Cushioned; Tapered

Chain Tong & Strap Wrenches



Strap Wrenches

Features:

- Strong, woven nylon strap gives tight grip.
- Polyurethane-coated strap prevents scratching.
- Replaceable straps available.

Overall Length: 18 in

Handle Length: 18 in

Handle Type: I-Beam

SKU	Opening Size
632-31360	5 in - 7 in

Combination Wrenches



Combination Wrenches

Features:

- Polished heads and raised panel.
- 12 Point boxed in for more angles.
- Precision shaped to reduce rounding.

Head Angle: 15° Box End

Offset Angle: 15°

Material: Carbon Steel

Finish: Nickel Chrome Plated

Measuring System: SAE

SKU	No. of Points	Opening Size	Overall Length
103-04-004	12	1/2 in	9-3/4 in
103-04-005	12	9/16 in	10-11/16 in



Jumbo Combination Wrenches

Features:

- Polished heads and raised panel.
- 12 Point boxed in for more angles.
- Precision shaped to reduce rounding.

Overall Length: 18-1/2 in

Head Angle: 15° Box End

Offset Angle: 15°

Material: Carbon Steel

Finish: Nickel Chrome Plated

Measuring System: SAE

SKU	No. of Points	Opening Size
103-04-013	12	1-1/16 in

Pipe Wrench Parts & Accessories



Pipe Wrench Replacement Parts

Features:

- Wrench Hook Jaw is a genuine Ridgid® part for steel or aluminum pipe wrenches.
- Its teeth provide a strong, dependable grip on your conduits.

SKU	Pipe Cap.	Type	Wrench Size	For Model
632-31695	3 in	Hook Jaw	24	E-24
632-31700	3 in	Heel Jaw and Pin Assembly	24	E-24
632-31720	5 in	Hook Jaw	36	E-36
632-31725	5 in	Heel Jaw and Pin Assembly	36	E-36
632-31745	6 in	Hook Jaw	48	48

Pipe Wrenches



Aluminum Straight Pipe Wrenches

Features:

- Nearly 40% lighter than comparable cast-iron models.
- Jaws and all other parts identical to Ridgid heavy duty wrenches.

Material: Aluminum

Jaw Material: Alloy Steel

Handle Type: I-Beam

SKU	Pipe Cap.	Overall Length	Wt.
632-31090	1-1/2 in	10 in	1 lb
632-47057	2 in	12 in	2-1/2 lb
632-31095	2 in	14 in	2-1/2 lb
632-31100	2-1/2 in	18 in	3-3/4 lb
632-31105	3 in	24 in	6 lb
632-31110	5 in	36 in	11 lb
632-31115	6 in	48 in	18-1/2 lb

RIDGID

Heavy-Duty Straight Pipe Wrenches

Features:

- Instant grip/release.
- Heat-treated replaceable jaw.
- Easy spin nonstick adjustment nut.
- Fully floating forged hook jaw.
- Replaceable hook and heel jaws.

Material: Cast Iron Handle

Jaw Material: Steel

Handle Type: I-Beam

SKU	Pipe Cap.	Overall Length
632-31000	3/4 in	6 in
632-31005	1 in	8 in
632-31010	1-1/2 in	10 in
632-31015	2 in	12 in
632-31020	2 in	14 in
632-31025	2-1/2 in	18 in
632-31030	3 in	24 in
632-31035	5 in	36 in
632-31040	6 in	48 in



Offset Pipe Wrenches

Features:

- Nearly 50% lighter than comparable cast-iron models of the same size.
- Features a jaw opening parallel to the handle.
- Narrow hook jaw head provides easy entry into tight spots.

Overall Length: 14 in

Material: Aluminum

Jaw Material: Alloy Steel

SKU	Pipe Cap.
632-31120	2 in

BRUSHING & SWEEPING PRODUCTS

Brushes & Brooms



Warehouse Brooms

Features:

- Ideal for heavy-duty sweeping tasks.
- Reliable broom corn bristles are sturdy, yet flexible.

Handle Length: 42 in

Bristle Length: 20 in



SKU	Bristle Material
103-W36-DZ	80/20 Corn/Sotol

CLEANING PRODUCTS

Dishwashing Cleaners



Manual Pot & Pan Dish Detergents

Features:

- The grease-fighting power of Dawn® dish soap, specifically formulated for tough business jobs.
- Long lasting suds provide greater cleaning capacity with less sink changeover.

Packing Type: Bottle



SKU	Capacity Vol.
608-45112	38 oz
608-57445	1 gal

Floor & Carpet Cleaners



Oil-Based Non-Sanded Floor Sweeping Compounds

Features:

- Non-abrasive sweeping compound safe to use on any floor.
- Perfect for collecting dirt and dust on all types of wood, tile, terrazzo, and finished concrete floors without scratching.



SKU	Capacity
103-FLOOR-SWEEP	50 lb

Oil-Based Sanded Floor Sweeping Compounds

Features:

- Popular regular formula features sanded grit with an oil base.
- Effective as an abrasive for loosening grime and dirt on warehouse floors.
- Suitable for unfinished wood or concrete surfaces.
- Ideal for heavy-duty industrial cleaning tasks.



SKU	Capacity
103-FLOOR-SWEEP-GRIT	50 lb
103-FLOOR-SWEEP-DRM300	300 lb

Glass Cleaners



Glass Cleaners

Features:

- Cleans with Ammonia-D® for a streak-free shine.
- Loosens soil upon contact.
- Won't streak or leave a film.
- Also cleans chrome, stainless steel, Plexiglas® and other hard surfaces.
- Contains no phosphates.

Chemical Compound: Ammonia-D



SKU	Capacity Vol.
889-322338	32 oz

PERSONAL HYGIENE

Hand Cleaners



Multi-Purpose Scrubbing Wipes

Features:

- Dual textured wipe, a textured side and a smooth side.
- Extra large, durable wipes.
- Multi-purpose to use on hands, tools, and surfaces.
- No water needed.
- Contains no harsh chemicals.
- Leaves hands feeling clean and refreshed.

Quantity: 72 Sheets Per Canister



SKU	W x L per sheet
103-360726	10 in x 12 in



Tub-O Towels® Multi Purpose Towels

Features:

- No water necessary.
- Contains lanolin, aloe vera & vitamin E.
- Kills germs.

Quantity: 90 per dispenser



SKU	W x L Per Sheet
296-TW90	10 in x 12 in



Natural Orange™ Pumice Hand Cleaners

Features:

- Pumice scrubbing particles get hands clean fast.
- Lotion formula provides powerful yet gentle cleaning performance.



SKU	Capacity Vol.
315-0955-04	1 gal

Scrubbing Wipes

Features:

- Cleans the toughest soils, whenever, wherever – no water needed.
- These extra large, dual textured wipes contain a scrubbing side for removing tough grease, tar and adhesives and a smooth side for quick dirt absorption.
- Contains skin conditioners to help prevent dryness and irritation.

Quantity: 72 per Bucket



SKU	W x L Per Sheet
315-6396-06	12 in x 10-1/2 in



All Purpose Waterless Hand Cleaners

Features:

- Unique blend designed to clean the hands without harsh acids or alkalis.
- Works equally well with or without the use of water.
- Leaves hands looking and feeling clean, conditioned, and without the greasy feeling associated with most hand cleaners.



SKU	Capacity Vol.
407-105	14 oz



WypAll® Waterless Hand Wipes

Features:

- Dual textured: smooth side for wiping and abrasive side for scrubbing.
- Tough on grime, easy on skin.
- Won't damage or fade tools, equipment or parts.
- Removes oil, grease, grim and dirt with ease.

Quantity: 75 per Bucket



SKU	W x L Per Sheet
412-91371	12 in x 10 in



Fast Orange® Pumice Lotion Hand Cleaners

Features:

- Waterless, petroleum solvent-free hand cleaner that contains no harsh chemicals, mineral oils or ammonia that can sting cuts and abrasions.
- Fortified with aloe, lanolin, glycerin, and other skin conditioners.
- Fine pumice formula gently deep cleans the toughest dirt.
- Works great on laundry stains, scuff marks, tile floors, pet odors and many other household cleaning needs.



SKU	Capacity Vol.
253-25219	1 gal



Hand Cleaner Towels

Features:

- Clean, citrus-scented formula loosens and dissolves industrial soils while leaving hands free from dryness and irritation.
- Rough Touch® blue towel locks in soil to prevent it from transferring back onto hands and surfaces.
- Hands are left feeling clean with no sticky residue and no rinsing required.



Quantity: 72 Sheets per Bucket

SKU	W x L Per Sheet
253-42272	10 in x 12 in

WASTE RECEPTACLES

Trash Can Liners



FLEX-O-BAG® Trash Can Liners and Contractor Bags

Features:

- Convenient large rolls of heavy industrial weight plastic bags in handy dispenser boxes and extra-long twist ties.
- Also included are Hold-Tite rubber bands to secure bag to can top; excluding Heavyweight Contractor Bags (HB42-20).
- No side seams to split and no gussets to weaken the bottom.



Thickness: 3 mil

Grade: Extra Heavy-Duty Contractor Bags

Quantity: 30 per Box

SKU	Capacity Vol.	Height	Width
795-HB55-30	- 55 gal	56 in	36 in

Trash Cans



BRUTE® Round Containers without Lid

Features:

- Durable, heavy-duty containers for a variety of uses.
- Proprietary design plus a UV inhibitor ensures long life.
- Venting channels reduce the force required to remove a full can liner.
- Integrated cinches secure liners for efficient knot-free changes.
- Seamless construction makes cleaning the container easier.
- Contoured base handles improve grip, reduce strain, and improve efficiency.
- Reinforced rims add strength and durability while transporting.
- Built-in, rounded handles allow easy, non-slip lifting and anti-jam nesting.
- Reinforced base built to withstand rough surfaces for extended life. Certified to NSF Standard #2 (gray, white and yellow) and Standard #21 (all colors).
- Lids sold separately.



Height: 33 in

Dia.: 26-1/2 in

Material: Heavy-Duty Plastic

SKU	Capacity Vol.
640-FG265500GRAY	55 gal

WIPING PRODUCTS

Towels & Wipers



WypAll® L30 Wipers

Features:

- Ideal for general-purpose, light-duty cleanups.
- Removes soils and liquids from face and hands.
- DRC (Double Re-Creped) design provides greater surface softness.
- Reinforced grid weave delivers added strength for wet surface wiping and cleaning.

Quantity: 90 per Pack



SKU	W x L per sheet
412-05812	12 in x 12.5 in



Original™ Multi-Purpose Shop Towels

Features:

- Ideal for changing oil, refilling fluids and general maintenance.
- Strong, absorbent towel is great for wiping hands, tools and cleaning up grease, oil, grime and fluids.
- Works well when wet.



SKU	W x L per sheet
412-75130	11 in x 9.4 in

Rags In A Box™ Heavy Duty Disposable Towels

Features:

- Ideal for painting, wiping up spills, staining and refinishing furniture.
- Soft, absorbent towels that perform like a cloth.
- Built-in handle allows you to take the box on the job while keeping rags clean.



SKU	W x L per sheet
412-75260	10 in x 12 in



X60 Cloth Wipers

Features:

- Absorbs more water and oil than rags for faster cleanup.
- Tough enough for big jobs, soft enough for face and hands if skin is uncompromised.
- Clean and consistent cloth every time.
- Portable, convenient point-of-use options enhance productivity.



SKU	W x L per sheet
412-34790	8.34 in x 16.8 in

X80 Heavy-Duty Cloths

Features:

- Replaces shop towels and white cotton rags.
- Doesn't fall apart when tackling the most demanding jobs - even in solvents.
- Absorbs 30% more water significantly faster, and leaves 3X less lint than shop towels.
- Rinse and reuse - reduces waste and cost.
- Clean and consistent cloth every time.



SKU	Color	W x L per sheet	Quantity	Packing Type
412-41041	Blue	11.1 in x 16.8 in	160 Sheets per Box	Box
412-41043	Blue	12.2 in x 12.4 in	475 Sheets per Roll	Jumbo Roll
412-41055	Red	12.2 in x 12.4 in	475 Sheets per Roll	Jumbo Roll

CRAYONS



Paintstik® Original B® Solid Paint Markers

Features:

- Solid paint marker combines the durability of paint in the convenience of a crayon.
- Superior marking performance on oily, icy, wet, dry, or cold surfaces.
- Weather-resistant and UV-resistant for long-lasting marks.
- Works on rough, rusty, or dirty surfaces.

Length: 4-3/4 in

Temp. Range: -50° F - 150° F

Flash Point: 204° C

SKU	Color	Dia.
434-80221	Yellow	11/16 in
434-80220	White	11/16 in



Quik Stik® All Purpose Solid Paint Markers

Features:

- Fast-drying, permanent, vibrant paint marks dry in 5 to 7 minutes.
- Marks on virtually any surface-wet, smooth, rough, or hot.
- New Easy Grip Airtight Cap for convenient pocket storage, self-storing cap keeps the marker clean and fresh between uses.
- Weather-resistant and UV-resistant paint for long-lasting marks.
- Solid paint marker advances and retracts in plastic holder by turning twist-up knob.

Length: 6 in

Temp. Range: 0° F - 392° F

Flash Point: 67.8° C

SKU	Color	Dia.
434-61051	White	11/16 in

MARKERS



Prime-Action™ Paint Markers

Features:

- Permanent, durable, fast-curing, industrial-strength paint is a great choice when you need your work to last.
- Rugged Prime-Action™ tip.
- Lead- and xylene-free paint.
- Marks on all surfaces, whether they're clean, dirty or oily.
- Reversible tip - switch easily between a bullet and chisel nib, depending on your needs.

Temp Range: -50° F - 150° F

Capacity Vol.: 10 ml

SKU	Color	Tip Size	Tip Type
900-PAINTMKR-YEL	Yellow	3/16 in; 1/8 in	Poly; Chisel/Bullet
900-PAINTMKR-WHT	White	2 mm x 4 mm	Poly; Chisel/Bullet



BRITE-MARK® Medium Paint Markers

Features:

- Make permanent bright marks on metal, rubber, plastic, glass, concrete, leather, stone, wood, vinyl and more.
- Formula is not xylene-based.
- Valve actuated mechanism prevents paint in barrel from drying when cap is left off.
- Heavy duty aluminum body with large paint capacity.
- Ideal for color coding.
- Bullet tips are replaceable to ensure complete use of paint in each marker.
- Drying Time: 25 – 35 seconds.

Tip Size: Medium; Fiber #15

Tip Type: Bullet

Temp Range: 0° F - 350° F

SKU	Color
253-84002	Black
253-84003	White
253-84004	Yellow



Paint-Riter® Valve Action® Paint Markers

Features:

- Variety of colors for improved mark identification, quality control, and parts inspection.
- Fast-drying, permanent paint for immediate handling reduces work downtime.
- Xylene-free paint reduces user health risks and makes for a safer marking tool.
- Dura-Nib medium bullet tip resists wear to provide long marking life.
- Durable metal barrel and clip-cap reduce breakage and store easily in pocket.

Tip Size: 1/8 in

Tip Type: Round Bullet

Temp Range: -50° F - 150° F

Capacity Vol.: 10 mL

SKU	Color
434-96820	White
434-96821	Yellow
434-96822	Red
434-96823	Black
434-96824	Orange
434-96825	Blue

Silver-Streak® Metal Marker Refills

Features:

- Highly-visible marks illuminate when cutting or welding.
- Superior to soapstone in markability and durability-will not rub, burn, or blow off surface.
- Marks on oily, wet, or rusty metals, and will not scratch or abrade surfaces.

Tip Size: 1/16 in

Tip Type: Variable (Refills)

Temp Range: 0° F - 150° F



SKU	Color
434-96007	Silver



Silver-Streak® Metal Markers with Mechanical Holder

Features:

- Highly-visible marks illuminate when cutting or welding.
- Superior to soapstone in markability and durability-will not rub, burn, or blow off surface.
- Marks on oily, wet or rusty metals, and will not scratch or abrade surfaces.
- Durable, mechanical holder prevents stick breakage and features a convenient, built-in sharpener, and pocket clip for easy storage.

Tip Size: 1/8 in

Tip Type: Round

SKU	Color
434-96006	Silver



Fine Tip Permanent Markers

Features:

- Permanent alcohol based ink that is fade and water resistant.
- Pocket clip for portability.

Tip Size: Fine

Tip Type: Bullet

SKU	Color
652-30001	Black



Mean Streak Permanent Marking Sticks

Features:

- Marking sticks mark on dark surfaces and write on most surfaces.
- Specially formulated to mark on wet and oily surfaces.
- Extra bold tip marks dark surfaces with an opaque line.
- Waterproof formula resists fading and adheres to virtually any surface.
- Easy-to-use, twist-up container.
- Quick-drying ink is waterproof, smearproof and fade-resistant.

Tip Size: Extra Bold

Tip Type: Bullet

SKU	Color
652-85018	White

PENCILS



Silver-Streak® Welders Pencils

Features:

- Economical, high-strength pencil is ideal for marking all types of metal surfaces – even oily, rusty or wet surfaces.
- Marks resistant to torch flames, will not rub off or burn off like soapstone.
- Highly visible marks illuminate when cutting or welding.
- Durable marks will not scratch or abrade metal surfaces.
- Hexagonal shape reduces barrel roll.
- Pre-sharpened pencils can be easily resharpened with any standard pencil sharpener.
- Highly visible silver color for darker surfaces.

Length: 7 in

SKU	Color	Lead Grade
434-96101	Silver	#2

SOAPSTONE HOLDERS



Standard Soapstone Holders

Features:

- Pocket clip.
- Positive lock adjustment.
- Spring tension friction guide for soapstone.

Includes: Pocket Clip; Soapstone

SKU	Shape	Length	Used With
900-RH-30	Round	5 in	Standard Round Soapstone
900-SH-10	Flat	5 in	Standard Flat Soapstone



Flat Soapstone Holders

Features:

- Quality construction for durability and appearance.
- Spring steel pocket clip oversized to fit leather aprons.
- Non-corrosive channel with brass indexing trigger provides superior sliding action.
- Practical design allows for one handed operation and easy use.
- Brass trigger depresses and slides to proper alignment hole and snaps back to lock in position.

SKU	Shape	Length
326-400-1	Flat	5 in

SOAPSTONES



Soapstones

Features:

- All white texture for excellent marking quality.
- Grain cut to ensure good strength and long service life.
- Marks will not contaminate welds and are easily removed.
- Low water content for increased hardness and resistance to breakage.

Length: 5 in

SKU	Shape
900-RD-5	Round
900-FL-5	Flat
900-FL-5-THIN	Flat

CHAIN, CABLE, ROPE & ACCESSORIES

Straps & Bungee Cords



Ratchet Tie-Down Straps

Features:

- Webbing is abrasion-resistant, won't rot or mildew, and maximizes strength.
- Ratchet provides greater tension with minimal force.
- Safety-first, spring-loaded release mechanism prevents ratchet from opening accidentally.

Length: 27 ft

Load Cap.: 3,333 lb

SKU	End Type	Width
130-04622	Double J-Hooks; Open Molded Handle; Steel Ratchet	2 in

DERRICK TAPES



Derrick Surveying Tapes

Features:

- Chrome Clad® blade.
- Extra large winding drum provides rapid line recovery and permits tape line to be easily detached from reel.
- Special hook ring with ribbed face at zero.
- Leather thong is provided to use through eye at rear when tape is removed from reel.

Blade Thickness: 0.019 in

Increment @ Scale: 0.01 ft @ 1 ft

No. of Scales: 1

Blade Material: Steel

Blade Finish: Chrome Clad®

End Type: Hook w/Ring

SKU	Blade Length	Blade Width
182-C2276DN	100 ft	1/4 in

FLANGE PINS & ALIGNERS



Two Hole Pins

Features:

- Sturdy two hole pins are machined from hardened steel for added durability and longevity.
- Utilize fast double lead threads instead of ACME threads for a more reliable hold over time.
- Lightweight.

Hole Diam: 1/2 in - 1-7/16 in

SKU	Material	Pin Type
496-42050-T	Alloy Steel	Threaded

FRAMING TOOLS



Stud Master Precision Framing Tools

Features:

- Proprietary technology slides every stud into place.
- Reduces framing time significantly.
- Eliminates any errors when doing on-center framing.
- Made in the USA.

SKU	Style
961-SM12-S	Stud Master 12
961-SM16-S	Stud Master 16
961-SM24-S	Stud Master 24

GAUGING TAPES



Atlas® Oil Gauging Tapes

Features:

- Heavy-duty frame designed for years of rugged use.
- All frames include a grounding strap.
- Choose from Chrome Clad®, Chrome Clad®/Nubian®, or Nubian® styles.
- Plumb bob must be ordered separately.

Blade Style: D1

Increment @ Scale: 1/8 in @ 1 ft

SKU	Blade Length	Blade Width
182-CN1290SF590N	25 ft	1/2 in

LEVELS



500 Series Magnetic I-Beam Levels

Features:

- Impact resistant acrylic mono vials offer superior durability.
- All metal I-Beam frame offers superior durability and protects long-life accuracy.
- High contrast vial surrounds improve vial visibility.
- Ergonomic, grip zones enhance comfort and portability.
- Impact resistant endcaps protect frame and vials.
- Hang hole for ease of storage.
- Made in U.S.A.

Accuracy: 0.0005 in/in

No. of Vials: 3

Body Material: Aluminum

Width: 1 in

Height: 2.25 in

SKU	Length	Vial Positions	Vial Material	Structure
272-500M.24	24 in	Horizontal/Vertical	Acrylic Mono	I Beam
272-500M.48	48 in	Horizontal/Vertical	Plastic	I Beam



Torpedo Levels

Features:

- Advanced frame design.
- Magnetic-base level.
- Top-read window.
- Tri-vial versatility.

Accuracy: 0.001

No. of Vials: 3

Vial Positions: (1) 45°; (1) Level; (1) Plumb

Vial Material: Plastic

Base Type: Grooved; Magnetic

Structure: I-Beam

Body Material: Aluminum

Width: 1.6 in

Height: 0.6 in

Wt.: 0.31 lb

SKU	Length
272-581-9	9 in



True Blue® Heavy-Duty Magnetic Torpedo Levels



Features:

- High contrast e-BAND™ vials highlight the edge of the bubble.
- V-Groove working edge for accurate alignment on pipe or conduit.
- Aluminum frame with top read window.

Accuracy: 0.0005 in per in

No. of Vials: 3

Vial Positions: 45°; Level; Plumb

Base Type: Magnetic; V-Groove

Body Material: Aluminum

SKU	Length
272-em81.9	9 in

SQUARES



True Blue® Combination Squares



Features:

- True Blue® vial for accuracy.
- Machined square head.
- Self-aligning drawbolt, hardened scriber.
- Etched blade with permanently marked graduations.

Graduation(s): 16ths, 32nds

No. of Scales: 1

Increment @ Scale: 1/16 in @ 1 in

Material: Steel

Finish: Matte

Measuring System: Inch

Wt.: 1/2 lb

SKU	Blade Length	Blade Width
272-e250	12 in	1 in

TAPE MEASURES

STANLEY

FatMax® Classic Tape Measures



Features:

- Durable high-impact case with non-slip rubber stands up to job site demands.
- Protective full tape blade Mylar® coating and added BladeArmor® coating at the hook extends tape life against abrasion and heavy use.
- Easy to read measurements with large font numbers.
- Standard stud markers.

Graduations: 1/16 in; Inch; Feet

No. of Scales: 3

Blade Material: Steel

Blade Finish: Mylar® Polyester Film; BladeArmor™ First 3 in

End Type: 3-Rivet Hook

Case Material: ABS Plastic; Rubber Grip

Return Motion: Automatic

SKU	Blade Length	Blade Width
680-33-725	25 ft	1-1/4 in

Powerlock® Tape Rules 1/2 in Wide Blade



Features:

- Cast-metal case is durable and suitable for heavy-duty use.
- Mylar® polyester film extends life of entire blade.
- Secure blade lock won't creep during measurements.
- Corrosion-resistant Tru-zero end hook for accurate measurements.

Graduations: 1/16; 1/10

No. of Scales: 2

Blade Material: Steel

Blade Finish: Mylar® Polyester Film

End Type: Hook

Case Material: Zinc

Return Motion: Spring

SKU	Blade Length	Blade Width
680-33-272	12 ft	1/2 in

STANLEY

**Powerlock® Tape Rules
Wide Blade**



Features:

- Seven-foot blade standout.
- Mylar® polyester film extends life of entire blade.
- Chrome high-impact ABS case is job site tough.
- Secure blade lock won't creep during measurements.
- Corrosion-resistant Tru-zero end hook for accurate measurements.

Graduations: 1/16 in

No. of Scales: 1

Blade Material: Steel

Blade Finish: Polyester

End Type: Hook

Case Material: ABS Plastic

Return Motion: Spring

SKU	Blade Length	Blade Width
680-33-425	25 ft	1 in

COVERING PRODUCTS

Tarps



Multiple Use Tarps

Features:

- Sun and fade resistant.
- Rot and rust proof.
- Reinforced hem.
- Heat-sealed seams.
- Grommets every 3 ft.

Material: Polyethylene

Thickness: 5 mil



SKU	Length	Width
101-0608	8 ft	6 ft
101-0810	10 ft	8 ft
101-1012	12 ft	10 ft
101-1020	20 ft	10 ft
101-2020-TARP	20 ft	20 ft

COCO MATS



Coco Mats

Features:

- Heavy-duty.
- Tough absorbent fibers hold up under any type of foot traffic.
- Mildew resistant.

Height: 1-1/2 in

Material: Densely Woven Fibers

SKU	Length	Width
103-AB-GDN-5	36 in	22 in

COMPRESSORS, BLOW GUNS, HOSES & FITTINGS

Blow Guns



Long John® Safety Air Guns

Features:

- Safety air guns are ideal for cleaning inaccessible and hard-to-reach areas.
- Use to blow off floor debris, clean masonry forms, tanks, ovens, molds and rafters, as well as machinery and storage areas.

Operating Pressure: 150 psi

Material: Aluminum Extension

Noise Level: 107 dB

Air Consumption: 34 cfm

Output: 2 lb

SKU	Extension Length	Inlet Size
335-75LJ012AA	12 in	1/4 in (FNPT)
335-75LJ024AA	24 in	1/4 in (FNPT)
335-75LJ036AA	36 in	1/4 in (FNPT)

CUTTING TOOLS

Circular Saws



Classic Series Portable Corded Carbide Saw Blades



Features:

- Precision-ground teeth for smooth, accurate cuts.
- Corrosion-resistant coating helps prevent rusting.

No. of Teeth: 24

Grind: ATB

Kerf: 0.087 in

Tooth Angle: 19°

SKU	Blade Diam	Arbor Diam
585-25130	7-1/4 in	5/8 in

DRILLING & FASTENING TOOLS

Drills



Unibit® High Speed Steel Fractional Self-Starting



Features:

- Single-flute cutting edge for greater control through steps.
- Hex shank prevents slipping in drill chuck.
- Also available with (TiN) coating for longer life.
- New SpeedPoint tip penetrates faster than previous Unibits and prevents walking.
- Ideal for drilling holes into thin materials such as stainless steel, copper, brass, aluminum, plastic and laminates.

Measurement Type: Fractional

Cutting Edge Material: HSS

SKU	Cutting Diam.	Material Thickness	No. of Steps
585-10235	1/4 in - 1-3/8 in	1/8 in	10
585-10234	3/16 in - 7/8 in	1/16 in	12
585-10231	1/8 in - 1/2 in	1/8 in	13

Wrenches



M18 FUEL™ High Torque 1/2 in Impact Wrenches with Friction Ring

Features:

- REDLINK PLUS™ intelligence prevents damage to the tool and battery due to overloading or overheating.
- Bolt removal mode provides maximum nut-busting torque to break fastener free, then slows to 750 RPM for more control when removing fasteners.
- Premium rubber over-mold withstands corrosive materials and provides increased comfort when in use.
- Features a friction ring design to ensure quick and easy socket changes.
- REDLITHIUM™ batteries deliver more work per charge and more work over the life of the battery.
- LED light to illuminate the work area.
- Available as tool only or kit.

Voltage: 18 V DC

Batt. Type: Lithium-Ion

Speed: 1750 RPM

Cycle Rate: 2100 IPM

Torque: 1400 ft-lb

Control Type: Trigger

Handle Type: Pistol Grip

Includes: (1) M18 FUEL™ 1/2 in High Torque Impact Wrench with Friction Ring (Tool Only) (2767-20); (2) M18™ REDLITHIUM™ XC5.0 Resistant Battery Pack (48-11-1850R); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812); (1) Blow Mold Case

SKU	Drive Size	Drive Type
495-2767-22R	1/2 in	Square



DRIVEN TO OUTPERFORM.™

M18 FUEL™ is engineered for the most demanding tradesmen in the world. Delivering unrivaled performance in a compact structure, all M18 FUEL™ products feature three MILWAUKEE® exclusive innovations — the POWERSTATE™ Brushless Motor, REDLITHIUM™ Battery Pack and REDLINK PLUS™ Intelligence Hardware and Software — that deliver unmatched power, run-time and durability. The M18 FUEL™ 4-1/2" / 5" Dual-Trigger Braking Grinder is the next advancement in angle grinders, providing greater control through dual-trigger activation, a permanent side handle, and AUTOSTOP™ kickback control.

M18 FUEL



1 POWERSTATE™ BRUSHLESS MOTOR

- MILWAUKEE® Designed and Built Brushless Motor
- Outperforms All Leading Competitors



2 REDLINK PLUS™ INTELLIGENCE

- Most Advanced Electronic System on the Market for Maximum Performance
- Total System Communication with Overload Protection Increases Tool Life




3 REDLITHIUM™ BATTERY PACK

FITS M18™ TOOLS

Battery and Charger Not Included.

DUAL-TRIGGER, TWO-HANDED OPERATION

MANDATORY FOR OPERATION



PERMANENT SIDE HANDLE, GREATER CONTROL

PROVIDES 15 POSITIONS



AUTOSTOP™ CONTROL, ADVANCED KICKBACK PROTECTION

SENSES KICKBACK AND STOPS ROTATION



SPECIFICATIONS

DESCRIPTION	SPECIFICATIONS	DESCRIPTION	SPECIFICATIONS
No Load RPM	3,500 – 8,500	Variable Speed	Yes
Wheel Diameter	4-1/2" / 5"	ONE-KEY™	Yes
Switch Type	Dual Paddle, No-Lock	Length (Tool-Only)	14.1"
AUTOSTOP™ Kickback Protection	Yes	Width (Tool-Only)	5.2" (Handle In) 10.3" (Handle Out)
RAPIDSTOP™ Brake	Yes	Height (Tool-Only)	5.4"
E-Clutch	Yes	Weight (Tool-Only)	5 lbs
Overload Protection	Yes		



M18 FUEL™ 4-1/2" / 5" Dual-Trigger Braking Grinder (Tool-Only) 495-2986-20

Includes: 2986-20 4-1/2" / 5" Enhanced Safety Grinder, T27 Guard, T1 Clip-On Guard, Back Flange, Wrench and Flange Nut.

Battery and Charger Not Included.





M18 FUEL™ w/ONE-KEY™ High Torque Impact Wrenches 3/4 in Friction Ring

Features:

- ONE-KEY™ compatible to customize, track and manage tool's performance and location.
- POWERSTATE™ brushless motor delivers up to 1200 ft-lb of fastening torque and 1500 ft-lb of nut-busting torque.
- Features a friction ring with thru-hole design to ensure quick and easy socket changes.
- Easily toggle up to four custom performance profiles that can be saved to the memory of the tool.
- Premium rubber over-mold withstands corrosive materials and provides increased comfort when in use.
- LED light to illuminate the work area.
- Available as tool only or kit.

Voltage: 18 V DC

Batt. Type: Lithium Ion

Speed: 1800 RPM

Torque: 1600 ft-lb

Control Type: Trigger

Handle Type: Pistol Grip

Includes: (1) M18 FUEL™ w/ONE-KEY™ High Torque Impact Wrench 3/4 in Friction Ring Bare Tool (2864-20); (2) M18™ REDLITHIUM™ XC5.0 Resistant Capacity Battery Pack (48-11-1850R); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812)

SKU	Drive Size	Drive Type
495-2864-22R	3/4 in	Square

FINISHING TOOLS

Grinders



Small Angle Grinders

Features:

- 11 Amp AC/DC 11,000 RPM motor designed for faster material removal and higher overload protection.
- Low profile gear case allows tool to fit into tight spaces.
- Quick-Change™ Wheel Release provides easier and quicker wheel removal without the need for a wrench.

Watts: 1400 W

Speed: 11000 RPM

Spindle Thread: 5/8 in - 11

SKU	Wheel Dia	Amps	Control Type	Includes
115-DWE402	4-1/2 in	11 A	Paddle Switch with Lock-Off	2-Position Side Handle; 4-1/2 in One-Touch™ Type 27 Guard
115-DWE402N	4-1/2 in	11 A	Paddle Switch with No Lock-On	One-Touch™ Guard; 2-Position Side Handle; Wrench



1-1/2 in Die Grinders

Features:

- Motor provides high power and speed for all 1-1/2 in grinding applications.
- AC/DC capacity works off welding machines and generators for increased productivity and versatility.
- Precision 1/4 in collet securely holds all proper accessories (1/8 in reducing sleeve as optional accessory).

Watts: 350 W

Amps: 4.2 A

Speed: 25,000 RPM

Control Type: Paddle; No-Locking

Includes: (2) Wrenches; Collet

SKU	Collet Size	Wheel Diam
115-DWE4887N	1/4 in	1-1/2 in

CLOTHING PROTECTION

Aprons



Bib Aprons

Features:

- High quality vinyl apron withstands a broad range of acids, solvents, grease, chemicals.
- Adjustable shoulder & waist cloth strap.
- Apron conceals a large portion of the body.

Width: 35 in

Material: Vinyl

SKU	Length
101-AG-100	45 in

Coveralls & Overalls

DUPONT

Tyvek®

Tyvek® 400 Coveralls

Features:

- Composed of Tyvek® 400 flash-spun, high-density polyethylene which creates a unique, nonwoven material.
- Offers inherent barrier against particles down to 1.0 micron in size.
- Protection built into the fabric itself, no films or laminates to abrade or wear away.
- Comfort fit design enables a greater range of movement while stretching and bending with reinforcement in high stress areas.



Color: White

SKU	Size Group
Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap	
251-TY127S-L	Large
251-TY127S-XL	X-Large
251-TY127S-2XL	2X-Large
251-TY127S-3XL	3X-Large
Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap	
251-TY120S-L	Large
251-TY120S-XL	X-Large
251-TY120S-2XL	2X-Large
251-TY120S-3XL	3X-Large
Serged Seams; Attached Hood (Respirator Fit); Attached Skid-Resistant Boot; Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap	
251-TY122S-L	Large
251-TY122S-XL	X-Large
251-TY122S-2XL	2X-Large
Serged Seams; Collar; Elastic Waist, Elastic Wrists and Ankles; Zipper Front; Storm Flap	
251-TY125SWHXL002500	X-Large
251-TY125S-2XL	2X-Large

Rainwear



3-Pc Rainsuits

Features:

- Jacket is vented back for breathability, duo-layer front closer to prevent wet, two front patch pockets for storage, and a corduroy collar for comfort.
- Removable hood with drawstring.
- Adjustable suspenders for overalls with triangular buckles for perfect fit and single snap fly.

Color: Yellow

Material: PVC Over Polyester



SKU	Size Group
101-9000-L	Large
101-9000-XL	X-Large
101-9000-2XL	2X-Large

Sleeves & Bibs



FR Sateen Sleeves

Features:

- Made with flame retardant (FR) cotton sateen.
- Elastic at both ends (bicep and wrist) for arm protection.

Material: Cotton Sateen

Closure Type: Elastic Bicep and Wrist



SKU	Size Group	Length
902-CA-340-18	One Size	18 in

DUPONT

Tyvek®

Tyvek® 400 Sleeves

Features:

- Inherent barrier protection against dry particulate hazards.
- Even after abrasion, stops sub-micron particles better than reusable garments.
- Serged seams.

Width: - 10 in

Closure Type: Serged

Color: White



SKU	Size Group	Length
251-TY500S	Standard	18 in

EAR PROTECTION

Earmuffs

3M

3M™ PELTOR™ Optime™ 95 Earmuffs H6B/V

Features:


- Stainless steel construction resists bending and warping.
- Earcup pivot points tilt for optimum comfort and efficiency.
- Lightweight with liquid/foam filled earmuff cushions.
- Color-coding for compliance sighting.

Mounting: Behind the Head



SKU	Noise Reduction Rate (NRR)
247-H6B/V	21 dB

An ideal balance of protection, durability and comfort



DuPont™ Tyvek® 400 garments are composed of a comfortable and durable nonwoven material that offers an inherent barrier against particles down to 1.0 micron in size, aerosols and light liquid splash. Protection is built into the fabric itself; there are no films or laminates to abrade or wear away. The breathable material will help keep workers comfortable without compromising safety.



DuPont Personal Protection

 DuPont™ Tyvek®

 DuPont Personal Protection

Contact us today for more information.

© 2024 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.



AUTHORIZED
DISTRIBUTOR

QM24PLUS® Earmuffs

Features:

- The dielectric QM24PLUS® is an ultra-lightweight, three-position earmuff designed for extended wear at a valued price.
- QM24PLUS® features an adjustable crown strap for a secure fit over-the-head, behind-the-head and below-the-chin.
- Soft foam cushions are easy-to-clean with soap and water, and can be replaced for extended use.

Mounting: Multiple-Position Headband



SKU	Noise Reduction Rate (NRR)
154-QM24PLUS	25 dB

VeriShield™ 100 Series Passive Earmuffs

Features:

- Large dimension range provides comfortable fit that is 17 percent more adjustable than earlier versions.
- Wide cup opening area increased by 16 percent over earlier versions.
- New unique memory foam combines denser and softer foam than previous models, suitable for wearers with sensitive ear canals or for wearing with hearing aids.
- Air Flow Control technology for optimum attenuations across all frequencies.
- Available in over-the-head, hard hat, and neckband styles.

Mounting: Over-the-Head



SKU	Noise Reduction Rate (NRR)
154-1035108-VS	30 dB

Earplug Parts & Accessories



PlugStation® Earplug Dispensers

Features:

- Compliance — High visibility to increase awareness for your hearing conservation program.
- Convenience — Hang a PlugStation® anywhere plugs are needed.
- Workers take one pair at a time so there are no wasteful grabbing of multiple pairs.
- When PlugStation® is empty, simply dispose of it and hang a new one.



SKU	Used With	Quantity
507-6644	SparkPlugs® Earplugs; Uncorded	(6) Dispensers; (6) Mounting Brackets; 250 Pairs per Dispenser
507-6645	SparkPlugs® Earplugs; Uncorded	(4) Dispensers; (4) Mounting Brackets; 500 Pairs per Dispenser

Earplugs



3M™ E-A-R™ Classic™ Earplugs 310-1001



Features:

- Flame-retardant.
- Moisture resistant.
- Shape prevents shifting and keeps effectiveness of noise seal constant.
- Slow recovery PVC foam provides comfort with low pressure.

Type: Uncorded

Quantity: 200 Pair per Box

SKU	Noise Reduction	Body Material
247-310-1001	29 dB	Polymer Foam

3M™ E-A-R™ Push-Ins™ Earplugs 318-1001



Features:

- No roll down earplugs.
- The patented E-A-R™ form foam tip is shaped and sized to mold comfortably to fit virtually every sized canal.
- The the unique foam actually softens and becomes more pliable with body temperature, the seal and comfort increases the longer the plugs are worn.

Type: Corded

Quantity: 100 Pair per Box

SKU	Noise Reduction	Body Material
247-318-1001	28 dB	Polyurethane

3M™ E-A-R™ Skull Screws™ Earplugs P1301



Features:

- Screws combine the tough look of threaded metal with the soft, comfortable feel of foam.
- Push-to-fit convenience.
- Earplugs combine comfort and noise attenuation for long-term wear.

Type: Corded

Quantity: 120 Pair per Box

SKU	Noise Reduction	Body Material
247-P1301	32 dB	Polyurethane




3M™ E-A-R™ Ultrafit® Earplugs 340-4004

Features:

- Conforms to oval shape of ear.
- No rolling or touching plug portion during insertion.
- Proprietary, premolded, triple-flange earplug design inserts easily and provides a comfortable fit for a reusable earplug.

Type: Corded

Quantity: 100 Pair per Box



SKU	Noise Reduction	Body Material
247-340-4004	25 dB	Elastomeric Polymer

3M™ Foam Earplugs 1100

Features:

- Smooth, dirt resistant surface for hygiene.
- Tapered shape to fit the ear canal comfortably.
- Hypo-allergenic material.
- Comfortable for a wide range of ear sizes.

Type: Uncorded Tapered

Quantity: 200 Pair per Box



SKU	Noise Reduction	Body Material
142-1100	29 dB	Foam



AUTHORIZED
DISTRIBUTOR

AirSoft® Reusable Earplugs

Features:

- Advanced air pocket design features internal noise-blocking fins.
- Rounded flanges, tapered shape fits better in the ear canal.
- Firm stem facilitates easy insertion and removal.
- Four-flange profile creates better seal in the ear canal.
- Less pressure in the ear canal eliminates that “plugged up” feeling.

Type: Corded

Quantity: 100 Pair per Box



SKU	Noise Reduction	Body Material
154-DPAS-30R	27 dB	Thermoplastic Elastomer



AUTHORIZED
DISTRIBUTOR

Fusion® Multiple-Use Earplugs

Features:

- FlexiFirm® stem is easy to grasp, ensuring easy insertion into the ear canal.
- SoftFlange™ creates comfortable seal in the ear canal for superior comfort and protection.
- Unique detachable nylon cord system adapts to virtually any application.

Type: Corded

Quantity: 100 Pair per Box



SKU	Noise Reduction	Body Material
154-FUS30-HP	27 dB	Thermoplastic Elastomer

Laser Lite® Disposable Earplugs

Features:

- Vibrant colors make protection visible.
- Self-adjusting polyurethane foam expands to fit virtually every wearer.
- Contoured T-shape for easy insertion and wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.



SKU	Noise Reduction	Body Material	Type	Quantity
154-LL-1	32 dB	Polyurethane Foam	Uncorded	200 Pair per Box
154-LL-1-D	32 dB	Polyurethane Foam	Uncorded	500 Pair per Box
154-LL-30	32 dB	Polyurethane Foam	Corded	100 Pair per Box

Laser Trak® Detectable Earplugs

Features:

- Non-ferrous metal grommet and bright colors – easily detected by visual and automated inspection.
- Self-adjusting polyurethane foam expands to fit virtually any wearer.
- Contoured T-shape for easy insertion and wear.

Type: Corded

Quantity: 100 Pair per Box



SKU	Noise Reduction	Body Material
154-LT-30	32 dB	Foam



AUTHORIZED
DISTRIBUTOR



MAXIMUM Disposable Earplugs

Features:

- Contoured design easier to insert, resists tendency to back out of ear canal.
- Polyurethane foam enhances comfort, especially for long-term wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.
- Bell shape delivers maximum in-ear comfort.

SKU	Noise Reduction	Body Material	Type	Quantity
154-MAX-1	33 dB	Polyurethane Foam	Uncorded	200 Pair per Box
154-MAX-30	33 dB	Polyurethane Foam	Corded	100 Pair per Box

MAXIMUM LITE Disposable Earplugs

Features:

- Low pressure polyurethane foam expands gently for comfortable long-term wear.
- Contoured T-shape for easy insertion and wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.



SKU	Noise Reduction	Body Material	Type	Quantity
154-LPF-1	30 dB	Foam	Uncorded	200 Pair per Box
154-LPF-30	30 dB	Foam	Corded	100 Pair per Box

Quiet® Reusable Earplugs

Features:

- Patented “no-roll” design is easy to handle and fit.
- Contoured shape comfortably matches contours of the ear canal.
- Built-in insertion stem makes insertion quick and easy.
- Smooth, non-irritating skin provides all-day comfort, easy to clean for long-term use.

Type: Corded

Quantity: 100 Pair per Box



SKU	Noise Reduction	Body Material
154-QD30	26 dB	Foam



AUTHORIZED
DISTRIBUTOR



SmartFit® Reusable Earplugs

Features:

- Conforming Material Technology™ adapts to the shape of the surrounding ear canal when in your ear, and returns the earplug to its original shape when removed.
- Delivers superior comfort and a truly individual fit.
- Simplifies inventory control - a single product can fit almost every wearer.

Type: Corded

Quantity: 100 Pair per Box

SKU	Noise Reduction	Body Material
154-SMF-30	25 dB	TPE



Pura-Fit® Foam Earplugs

Features:

- Long length for easy fitting and removal.
- Bright color for easy compliance checks.
- Tapered design to fit the ear canal.
- Non-irritating, smooth surface for added comfort.



SKU	Noise Reduction	Type	Quantity
507-6800	33 dB	Uncorded	200 Pair per Box
507-6900	33 dB	Corded	100 Pair per Box

Rockets® Reusable Earplugs

Features:

- Easy grip handle.
- Air bubble in the tip provides cushioned comfort.
- Easy insertion in any size ear canal.
- Pocket-Pak® carrying case for plug storage, slips easily into pocket.
- Washable and reusable.

Type: Corded

Quantity: 50 Pair per Box



SKU	Noise Reduction	Body Material
507-6405	27 dB	TPE



SparkPlugs® Foam Earplugs

Features:

- Extra soft foam and tapered design fit snugly and comfortable in the ear.
- Bright, fun colors provide easy compliance checks.



SKU	Noise Reduction	Type	Quantity
507-6604	33 dB	Uncorded	200 Pair per Box
507-6654	33 dB	Corded	100 Pair per Box

EYE PROTECTION

Safety Glass Parts & Accessories



Lens Cleaning Towelette Dispensers

Features:

- Pre-moistened with C-Clear Anti-Fog, Anti-Static formula for use on plastic, polycarbonate and glass lenses.
- Strategic placement of towelette dispensers throughout a facility will promote proper lens cleaning habits and extend the life of prescription and non-prescription eyewear.
- Contains no silicone.
- Safe and effective with all lens coatings including Anti-Reflective Coating.
- Also good for use on goggles, face shields, CRT screens and microscopes.



Width: 5 in

SKU	Includes	Length
101-70-AB	100 Individual Wipes per Dispenser	8 in



Spec Saver® Towelettes

Features:

- Premoistened towelettes are safe to use on plastic, polycarbonate and glass lenses.
- Safe and effective with all types of lens coatings.
- Ideal for glasses, goggles, face shields, and computer screens.
- Anti-fog, anti-static formula; contains no silicone.
- Individual use packets are easy to carry.



Width: 8-1/2 in

SKU	Includes	Length
135-LCT	100 Individual Wipes per Dispenser	5 in



Slip-On Sideshields



Features:

- These flexible sideshields are engineered to fit all types of eyewear including prescription glasses.
- Dust and nuisance protection.
- Easy-on, easy-off.

SKU	Width
292-99705	2 in

Safety Glasses



V30 Nemesis™ Safety Glasses



Features:

- Safety glasses feature a sporty, flexible, lightweight design.
- Wraparound frame has a base curve of 8 that extends the range of peripheral protection, as well as soft touch temples for comfort.
- Patented FLEX-DRY* nose piece designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose for long-term comfort.
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection.
- Includes neck cord for securing them, so that the glasses are ready to protect at a moment's notice.

Lens Material: Polycarbonate

SKU	Frame Color	Temple Color	Lens Tint	Lens Coating/ Shade
99.9% UVA/UVB/UVC				
412-14481	Black	Black	Blue Mirror	Mirror
412-25688	Black	Black	Smoke Mirror	Mirror
412-25671	Black	Black	IRUV Shade 5	Uncoated; IRUV Shade 5
412-25676	Black	Black	Clear	Uncoated
412-25685	Black	Black	Indoor/Outdoor	Uncoated
412-19644	Camouflage	Camouflage	Bronze	Uncoated
99.9% UVA/UVB/UVC; Fog				
412-25679	Black	Black	Clear	Anti-Fog
412-22475	Black	Black	Smoke	Anti-Fog
412-22609	Camouflage	Camouflage	Smoke	Anti-Fog



KLEENGUARD™

V60 Nemesis™ Rx Readers Prescription Safety Glasses

Features:

- Features a sporty, flexible, lightweight design.
- Wraparound frame has a base curve of 8 that extends the range of peripheral protection, as well as soft touch temples for comfort.
- Corrective lenses are hard coated for scratch resistance and longer life.
- Patented FLEX-DRY* nose piece designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose for long-term comfort.
- Includes neck cord for securing them, so that the glasses are ready to protect at a moment's notice.

Lens Tint: Clear

Diopter Strength: +1.5

Lens Material: Polycarbonate

Lens Coating/Shade: Hard Coated

Resistance: 99.9% UVA/UVB/UVC; Scratch

SKU	Frame Color	Temple Color
412-28621	Black	Black



BearKat® BK1 Series Safety Glasses

Features:

- The BearKat® BK1's super well thought-out construction combines the best in safety, comfort, and affordability.
- Your vision is unobstructed by the one-piece wraparound lens, which by its tight fit allows you maximum safety.
- Comfort is enhanced by the flexible temples and the non-slip temple sleeves are notched for a clip-on breakaway cord.

Lens Material: Polycarbonate

SKU	Frame Color	Temple Color	Lens Tint	Lens Coating/Shade
135-BK112	Gray	Gray	Gray	Duramass® Scratch-Resistant
135-BK110	Clear	Clear	Clear	Duramass® Scratch-Resistant
135-BK110AF	Clear	Clear	Clear	Anti-Fog; Duramass® Scratch-Resistant



Checklite® CL1 Frameless Safety Glasses

Features:

- Rugged polycarbonate lens.
- Smaller frame sized to fit smaller faces.

Lens Tint: Clear

Lens Material: Polycarbonate Lens with Nose Piece

Lens Coating/Shade: Duramass® Hard Coat

Resistance: 99.9% UV; Scratch

SKU	Frame Color	Temple Color
135-CL110	None	Clear Polycarbonate



Smith & Wesson®

Elite® Safety Glasses

Features:

- Dual lens offer wrap-around protection, and the wide temple provides structural integrity and stability.
- Lightweight and feature a retro design that provides a stylish fashion statement.
- Includes a Smith & Wesson® branded microfiber carry bag that doubles as a cleaning cloth.

Lens Tint: Smoke

Lens Material: Polycarbonate

Lens Coating/Shade: Uncoated

Resistance: 99.9% UVA/UVB/UVC

SKU	Frame Color	Temple Color
412-21303	Black	Black



Safety Goggles



Soft-Sided Goggle

Features:

- Soft frame fits snugly and comfortably over face and Rx glasses.
- Hooded vents offer maximum fog-free protection.
- Accommodates magnifier plate.
- Complete with shade 5 lens.

Lens Material: Hardened Glass

Frame Material: Vinyl

Ventilation: Hooded Vent

Strap Material: Elastic

SKU	Frame Color	Lens Tint
901-WG-2414SLF	Green	Green





AUTHORIZED DISTRIBUTOR



Stealth® Goggles

Features:

- Futuristic, low profile design for chemical splash and impact.
- Toric lens provides superior optics and peripheral vision.
- Prescription insert available.

Lens Coating/Shade: HydroShield™ Anti-Fog

Lens Material: Polycarbonate

Frame Material: Elastomer

Ventilation: Indirect Vent

Strap Material: Neoprene, Rubber

SKU	Frame Color	Lens Tint
763-S3960HS	Gray	Clear

FIRE, GAS & WATER PROTECTION

Detectors



THE POWER OF CONNECTED



BW Clip Single-Gas Detectors

Features:

- One button operation.
- Operates up to two years use without calibration, sensor replacement, or battery recharging/replacement.
- Wide angle flash which alerts simultaneously with audible and vibrating alarm.
- Automatic logging of the 35 most recent gas events.
- Compatible with IntelliDoX, Fleet Manager II Software.

Gas Type: Hydrogen Sulfide

Alarm Setting: Low 10 ppm; High 15 ppm

Temp. Range: -40° F - 122° F

Sound Level: 95 dBA

Display Type: LCD

Power Source: Lithium Battery

Run Time: 2 Years

SKU	Includes	Sensor Type
126-BWC2-H	Specified Sensor; Stainless Steel Alligator Clip; Concussion-Proof Housing; Test Cap; Instructions	Surecell™

Fire Extinguishers



FA110 Multipurpose Home Fire Extinguishers

Features:

- Clear instruction label using graphics to show steps required to operate extinguisher.
- Easy-to-read gauge tells you fire extinguisher is charged and ready for use.
- Easy-to-pull safety pin.

Fire Type: Class A, B and C Fires

Extinguishing Material: Monoammonium Phosphate

Mounting Position: Wall

Operating Temp.: -40° F - 120° F



SKU	Capacity Wt.	Operating Distance
408-466142MTL	2.5 lb	6 ft - 8 ft

ProLine™ Multi-Purpose Dry Chemical Fire Extinguishers

Features:

- Rechargeable.
- Designed to meet most commercial and industrial specifications.
- Tough impact resistant metal valve, handle and lever.
- Powder coated cylinder for corrosion protection.
- Easy-to-read gauge.

Fire Type: Class A, B and C Fires

Extinguishing Material: Monoammonium Phosphate

Mounting Position: Upright

Operating Temp.: -40° F - 120° F



SKU	Capacity Wt.	Operating Distance
408-466112	5 lb	12 ft - 18 ft
408-466204	10 lb	16 ft - 20 ft
408-466206	20 lb	16 ft - 20 ft

FIRST AID SAFETY

Eye Wash

Honeywell

Eyewash Wall Stations

Features:

- Mounts to wall with provided screws.
- Overhang protects bottles from dust and debris.
- Twist off, tamper resistant tabs prevent leaking and are easily removed in an emergency.
- Holds factory-sealed, sterile, preserved, buffered saline solution bottles firmly in place for easy access in an emergency.
- Simple, highly visible, operating instructions are provided on each unit.

Capacity Vol.: 32 oz



SKU

714-32-000462-0000-H5

Personal Eye Wash Solutions

Features:

- Portable and readily available for use.
- Designed for flushing nuisance particles such as pollen, dust, sawdust, smoke as well as for immediate treatment.
- Bottles contain a buffered, saline solution that is sterile and superior to tap water for emergency eye care.
- Blow-fill-seal bottles with extended-flow nozzles are tamper resistant, yet easily removed in an emergency.
- Deliver drops or an irrigating stream of solution, depending on the squeeze pressure applied to the bottle.



SKU

203-32-000454-0000-H5

Capacity Vol.

16 oz

203-32-000455-0000-H5

32 oz

Personal Eyewash Products

Features:

- Eyesaline® solution delivery.
- Easy open top.
- User-controlled volume delivery.
- Quality assured manufacturing.

Capacity Vol.: 4 oz



SKU

203-32-000452-0000

First Aid Kits



10 Person First Aid Kits

Features:

- 10 person first aid kit.
- ANSI Standard compliant.
- Durable plastic case.
- Water resistant gasket.

Length: 5.5 in

Width: 8.75 in

Height: 3 in

SKU	Case Material
101-10-9-FAKP	Plastic

25 Person First Aid Kits

Features:

- 25 Person First Aid Kits, ANSI.
- Come with either a durable plastic or metal case.

Length: 10 in

Width: 7 in

Height: 3 in



SKU	Case Material
101-25-3-FAKP	Plastic
101-25-9-FAKP	Plastic

HAND PROTECTION

Gloves

HyFlex®

11-600 Palm-Coated Gloves

Features:

- Designed for light and delicate applications in dry environments that require high levels of dexterity.
- Offers comfortable and exact handling of small objects.
- Light-duty, multi-purpose, industrial gloves.

Coating: Polyurethane

Style: Palm Coated

Cuff Style: Knit-Wrist

Material: Nylon; Polyurethane



SKU	Size Group	Lining
012-11-600-9-BK	9	Nylon
012-11-600-10-BK	10	Nylon



MaxiFlex® Ultimate™ Nitrile Coated Micro-Foam Grip Gloves

Features:

- Ideal for precision handling in dry environments.
- MicroFoam Nitrile coatings are compatible with light oils and will provide a good grip and excellent abrasion resistance.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Patented micro-foam nitrile coating offers 360° breathability.
- Mimics the “hand at rest”, reducing hand fatigue and increasing comfort.
- The micro-cup finish allows for a controlled and optimized grip.

Coating: Nitrile

Style: Palm and Finger Coated; Seamless Knit

Cuff Style: Knit-Wrist

Material: Nitrile; Nylon with Lycra®

Lining: Nylon with Lycra®



SKU	Size Group
112-34-874/M	Medium
112-34-874/L	Large
112-34-874/XL	X-Large



ATLAS® 300 General Purpose Latex Coated Fingers/Palm Gloves

Features:

- General-purpose glove is ergonomically designed to improve performance and comfort over a range of applications.
- Breathable open-back design maintains a comfortable temperature.
- Seamless knit with cotton polyester liner.
- Elasticated wrist prevents dirt from entering the glove.
- Rough-textured natural rubber palm coating provides maximum grip and dexterity.

Coating: Latex Full Fingers and Palm

Cuff Style: Elastic Knit-Wrist

Material: Cotton; Latex; Polyester; Seamless Knit

Lining: Cotton; Polyester



SKU	Size Group
845-300L-09	Large



92-600 Nitrile Powder-Free Disposable Gloves



Features:

- Made with TNT Chemical Splash Resistance Technology for superior protection against harmful chemical splashes.
- Super soft nitrile provides a comfortable, silky feel for extended wear.
- Proprietary formulation provides robust durability in a softer glove.
- Silicone-free design is paint, finish, and coating friendly.

Thickness: 4.9 mil Palm; 5.5 mil Finger

Cuff Style: Beaded; Standard

SKU	Size Group	Material
012-92-600-8.5-9	Large	Nitrile; Type I Latex



Standard Weight Jersey Gloves

Features:

- Regular weight.
- Soft, comfortable jersey for general duty and light abrasion applications.

Cuff Style: Knit-Wrist

Lining: Unlined



SKU	Size Group	Material
101-1200	Large	Cotton; Polyester

Anchor Brand 7-ga Standard Weight Seamless String-Knit Gloves

Features:

- Seamless cotton/polyester knit shell is comfortable and flexible.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Reversible design allows replacing one glove at a time, rather than pairs.
- Can be used as a glove liner.

Cuff Style: Knit Wrist



SKU	Size Group	Material
101-6700	Large	Cotton/Polyester

HEAD/FACE PROTECTION

Faceshields & Visors



Visors

Features:

- Clear or shaded available.
- Durable and high-performance.

Used With: Jackson Safety® Head Gear/Cap Adaptors

Color: Clear

Length: 15-1/2 in

Height: 9 in

Thickness: 0.040 in



SKU	Lens Material	Binding	Style
101-3440-B-CL	PETG	Aluminum Bound	Bound Visor
101-3440-U-CL	PETG	Unbound	Unbound Visor



AUTHORIZED
DISTRIBUTOR

High Performance® Faceshield Windows

Features:

- Injection molded from propionate.
- Heat and scratch resistant.
- Fits easily and comfortably over required protective spectacles or respirators.

Color: Clear

Thickness: 0.06 in

Lens Material: Propionate



SKU	Used With	Style	Height
280-4178CL	F-400, F-500, FH-66, FM-70, FM-71 Series	Wide View	8 in
280-4199CL	F-400, F-500 & FH-66 Series;40050066	Extended View	9 in



AUTHORIZED
DISTRIBUTOR

Bionic® Face Shield Replacement Visors

Features:

- Provides reliable protection from airborne debris.
- Curved window provides unobstructed view.
- Reinforced polycarbonate construction.

Used With: Bionic® Shield face shield

Style: Full shield

Height: 9-1/2 in

Thickness: 0.040 in



SKU	Lens Coating/Shade	Lens Material
763-S8550	Uncoated/Clear	Polycarbonate



AUTHORIZED
DISTRIBUTOR

Bionic™ Faceshields

Features:

- Shell offers built-in chin protection and extended top-of-head coverage.
- Highly adjustable headgear tilts visor nearer or farther from face depending on preference and application.
- Comfortable cell foam on back of headgear.
- Breathable, removable, washable headband.

Length: 14-1/2 in

Height: 9-1/2 in

Lens Material: Polycarbonate



SKU	Lens Coating/Shade	Thickness	Model
763-S8500	Uncoated/Clear	0.040 in	Bionic® Shield face shield with uncoated lens
763-S8510	HC/AF/Clear	0.0040 in	Bionic® Shield face shield with hardcoat lens



F30 Acetate Faceshields

Features:

- Ideal for scratch resistance and premium optics.
- High-grade cast sheet acetate protects against splash.
- 99.9% UV protection.

Binding: Bound

Length: 15-1/2 in

Height: 9 in

Lens Coating/Shade: Clear

Lens Material: Acetate



SKU	Used With	Thickness	Model
138-29079	Jackson Safety Headgear	0.04 in	3440
138-29091	Jackson Safety Headgear	0.047 in	3440 BULK

F50 Polycarbonate Special Face Shields

Features:

- Designed to provide protection against high heat applications, flying debris, and D3 rating chemical splash.
- IRUV filter additives in shade 3 and 5 provide additional infrared and ultraviolet radiation protection.


Binding: Unbound

Style: D Shape

Length: 15.5 in

Height: 8 in

Thickness: 0.060 in



SKU	Lens Coating/Shade	Lens Material
138-29080	IRUV 5.0	Polycarbonate



THE V-Gard C1™ HARD HAT

A higher degree of heat stress protection. The patent-pending ReflectIR™ Thermal Barrier works to block the energy of the sun, keeping the inside of the hard hat up to 20°F (11°C) cooler, reducing the risk of heat stress. Find where to buy at www.msasafety.com/vgardc1.

MSA
The Safety Company



Universal Faceshields

Features:

- Superior face protection from dangerous liquid splashes and flying debris.
- Compatible with a variety of brackets and face shield sizes and materials.

Style: Universal

Length: 16 in

Height: 8 in

Thickness: 0.04 in



SKU	Lens Coating/Shade	Lens Material
135-181640	Uncoated	PETG

Hard Hat & Cap Parts & Accessories



The Safety Company

Fas-Trac® III Replacement Suspensions

Features:

- Ratchet suspension and flush rear lug attachments eliminate pressure points for additional wearer comfort.
- Three levels of nape strap adjustment ensure a customized fit.
- Graspable ratchet with ultra-smooth rotation and steadfast hold.

Material: Plastic/Nylon

Suspension: 4-Point Ratchet



SKU	Used With
454-10148708	V-Gard®; V-Gard 500; V-Gard GREEN; SmoothDome®
454-10126693	MSA Skullgard® and Comfo-Cap® Helmets
454-10153385	MSA Skullgard® Helmets

Sun Shields

Features:

- Front portion is Lexan tinted.
- Protects wearer's ears and neck from sun rays.
- Extends brim all the way around.

Material: Polyurethane



SKU	Used With	Suspension
454-697410	V-Gard	Attaches to Brim

Hard Hats & Caps



The Safety Company

Skullgard® Protective Caps and Hats



Features:

- Strong, protective hats offer outstanding protection in hot, dangerous industries.
- Tested to radiant heat loads producing temperatures up to, but not exceeding, 350F.
- Smooth crown allows easy use of MSA welding equipment.
- Heavy duty construction produces a sturdy, reliable product for long-lasting use.

Adjusting Method: Ratchet

Material: Phenolic

Size Group: Standard; 6-1/2 to 8

SKU	Color	Suspension
454-475395	Natural Tan	Fas-Trac® Ratchet
454-475407	Natural Tan	Fas-Trac® Ratchet

V-Gard® Protective Hats

Features:

- Convenient caps and hats provide comfortable, lightweight protection.
- Polyethylene shell provides superior impact protection.

Adjusting Method: Ratchet

Material: Polyethylene

Size Group: Standard; 6-1/2 to 8



SKU	Suspension
454-475369	Fas-Trac®

V-Gard® Slotted Hard Hat Caps

Features:

- Comfortable, durable protection.
- Polyethylene shell provides superior impact protection.
- Iconic V design has been a mainstay for many years on even the toughest worksites.

Adjusting Method: Ratchet

Material: Polyethylene

Size Group: 6-1/2 in to 8 in; Standard



SKU	Suspension
454-475358	Fas-Trac® III

Welding Helmet Parts & Accessories



Cover Lens

Features:

- Meets all applicable specifications and standards.
- Resistant to abrasion, pitting, spatter, chemicals and solvents.

Resistance: Scratch

Window Size: 4-1/4 in x 2 in

Material: 100% Polycarbonate

SKU	Lens Coating/ Shade
101-PCC-24	Clear

Safety Plates

Features:

- Impact resistant.
- Optically correct.
- Distortion free.



SKU	Material
101-PC-24-GOPHER	Polycarbonate



Cover Lens

Features:

- Convenient protective cover lens is resistant to abrasion, pitting, spatter, chemicals and solvents.
- Optically correct and balanced.
- Provides superior welding lens protection.

Resistance: Scratch; Static



SKU	Lens Coating/ Shade	Window Size	Material
901-SP-1	Clear	2 in x 4.25 in	70% CR-39 Plastic
901-SP-2	Clear	2 in x 4.25 in	100% CR-39 Plastic
901-SP-35	Clear	4-1/2 in x 5-1/4 in	50% CR-39 Plastic

Glass Filter Plates

Features:

- Best Welds filter plates offer ultimate protection against ultraviolet and infrared rays present in the welding environment.
- Precision ground and edged to allow a safe and proper fit.
- Precisely shaded and optically correct.

Resistance: Heat treated, but not unbreakable. It is not a safety lens.

Window Size: 2 x 4-1/4 in

Material: Hardened Glass

Color: Green



SKU	Lens Coating/ Shade
901-932-105-10	10



Safety Plate

Features:

- Safety plate provides strong impact resistance for added safety.
- Optically correct and balanced.
- Light-weight.

Resistance: Impact Resistant

Material: Polycarbonate



SKU	Style	Lens Coating/ Shade	Window Size
901-932-440	Rectangular	Clear	2 in x 4-1/4 in
901-932-442	Rectangular	Clear	4-1/2 in x 5-1/4 in



AUTHORIZED DISTRIBUTOR

Speedy-Loop™ Mounting Systems



Features:

- Easy on/off system for mounting welding helmets onto protective caps.
- Fully adjustable.

Material: Plastic

Size: Adjustable

SKU	Used With
280-5000-H5	Fibre-Metal Protective Caps

Welding Helmets



Insight Digital Variable ADF Welding Helmets



Features:

- Variable shades to shield and protect eyes from radiant energy during weld.
- Viewing area offers unobstructed views during all stages of welding process without lifting hood.
- Sensitivity and delay adjustments for different tasks and duration.
- Weld and grind modes.
- Four independent sensors reduce blockage possibility.
- Operates with lithium battery power.
- Low-battery indicator light.

Window Size: 3.93 in x 2.36 in

Size of Cartridge: 5.25 in x 4.5 in

Material: Thermoplastic

Suspension: Ratchet

Used With: HSL 100 shell; Lithium batteries; #40710 - ADF; #46128 - ADF Cartridge; #41594 - Safety Plate; #41589 - Plate Kit; #20696 - Headgear

SKU	Lens Coating/ Shade
138-46129	9 to 13

HEAT STRESS PROTECTION

Activity Drinks



G Series O2 Perform® Thirst Quencher Instant Powders



Features:

- Hydrates with electrolytes that help them replace the carbs, electrolytes and fluids they lose when they sweat.
- Carbohydrates help stimulate rapid fluid absorption and fuel the active body.

SKU	Package Yield	Capacity Vol.	Flavor
308-33673	2.5 gal	21 oz	Frost Riptide Rush
308-33677	2.5 gal	21 oz	Glacier Freeze
308-33691	2.5 gal	21 oz	Fruit Punch
308-03969	2.5 gal	21 oz	Lemon-Lime
308-03970	2.5 gal	21 oz	Orange
308-03944	2.5 gal	21 oz	Fruit Punch; Lemon-Lime; Orange; Frost Riptide Rush
308-03968	6 gal	51 oz	Orange
308-33690	6 gal	51 oz	Fruit Punch
308-33676	6 gal	51 oz	Glacier Freeze

G Zero Powder Sticks

Features:

- Gatorade® G Zero in convenient single serve sticks.
- Sugar-free G Zero packs are designed for those on the go, simply add to a 20 oz bottle of water.
- Gatorade® G Zero is an ideal electrolyte solution for those interested in maintaining a ketosis state.

Packing Type: Powder Stick



SKU	Package Yield	Capacity Vol.	Flavor
308-04457	16.9 oz	0.10 oz	Glacier Freeze
308-04713	16.9 oz	0.10 oz	Fruit Punch
308-04712	16.9 oz	0.10 oz	Grape

Liquid Concentrates

Features:

- Drink mixes have a blend of electrolytes and carbohydrates to help speed hydration and restore energy.
- Caffeine-free.
- Mix with water per instructions.

Packing Type: Jug



SKU	Package Yield	Capacity Vol.	Flavor
308-33977	6 gal	1 gal	Fruit Punch
308-03955	6 gal	1 gal	Orange
308-03984	6 gal	1 gal	Lemon-Lime



Powder Sticks

Features:

- Powdered mix contains the same electrolyte formula found in the original Gatorade.
- The refreshing choice when you need to replace electrolytes lost from sweat while performing rigorous physical activity.
- Take these convenient packets with you anywhere

Packing Type: Powder Stick



SKU	Package Yield	Capacity Vol.	Flavor
308-04702	16.9 oz	1.23 oz	Fruit Punch
308-04701	16.9 oz	1.23 oz	Orange
308-04700	16.9 oz	1.23 oz	Lemon Lime



Qwik Stik® ZERO Sugar

Features:

- Great-tasting sugar-free electrolyte replacement.
- Ideal for diabetics and carb-conscious consumers.

Quantity: 50 Sticks Per Pack

Packing Type: Pack



SKU	Package Yield	Capacity Vol.	Flavor
690-159060099	20 oz	0.11 oz	ZERO Sugar Strawberry Lemonade
690-159060100	20 oz	0.11 oz	ZERO Sugar Orange
690-159060101	20 oz	0.11 oz	ZERO Sugar Mixed Berry
690-159060102	20 oz	0.11 oz	ZERO Sugar Fruit Punch
690-159060103	20 oz	0.11 oz	ZERO Sugar Lemonade
690-159060106	20 oz	0.11 oz	ZERO Sugar Lemon-Lime
690-159060107	20 oz	0.11 oz	ZERO Sugar Grape
690-159060109	20 oz	0.11 oz	ZERO Sugar Cool Citrus
690-159060119	20 oz	0.11 oz	ZERO Sugar Fruit Punch; ZERO Sugar Mixed Berry; ZERO Sugar Orange; ZERO Sugar Strawberry Lemonade

Squeeze® Freezer Pops

Features:

- Great way to cool down the body during hot or fatiguing work situations.
- Just freeze and serve to administer a tasty way to provide electrolytes to any work crew.
- Formulated to be absorbed significantly faster than water, allowing the body to replenish electrolytes and minerals for proper hydration.

Flavor: Cherry; Grape; Lemon-Lime; Mixed Berry; Orange

Quantity: 10 Tubes Per Pack

Packing Type: Tube



SKU	Package Yield	Capacity Vol.
690-159200201	3 oz	3 oz



Squawchee® ZERO Freezer Pops

Features:

- Great way to cool down the body during hot or fatiguing work situations.
- Just freeze and serve to administer a tasty way to provide electrolytes to any work crew but without the sugar.
- Formulated to be absorbed significantly faster than water, allowing the body to replenish electrolytes and minerals for proper hydration.

Flavor: Dragon Fruit; Mixed Berry; Orange; Punch; Watermelon

Quantity: 10 Tubes Per Pack

Packing Type: Tube



SKU	Package Yield	Capacity Vol.
690-159200231	3 oz	3 oz

Sweat Bands



Headgear Sweatbands

Features:

- Individually packaged.
- Hook & loop closure allows the fit onto most major brand headgear.
- Sweat absorbent air cushioned layer lined with 100% fleece cotton.

Strap Type: Hook and Loop



SKU	Material
101-SB320V	Fleece Cotton



Headgear Sweatbands

Features:

- Air cushioned, sweat absorbing layer surrounded by 100% fleecy cotton cover.
- Flame retardant for industrial use.
- Hook & loop closure allows the fit onto most major brand headgear.



SKU	Material
902-SB310V	FR Fleece Cotton

LOCKING DEVICES

Lock Boxes



Group Lock Boxes

Features:

- Red lockout color identifies the safety lockout application.
- Effective alternative to requiring each authorized lockout team member to place one of their personal safety locks at every lockout point in the system.
- Up to 13 workers can apply their personal safety locks.

Length: 9-1/4 in

Height: 6 in

Color: Red



SKU	Material	Width
470-498A	Steel	3-3/4 in

Lockouts & Hasps



Safety Lockout Hasps

Features:

- Compatible with No. 3, 410, 411 and 6835 safety lockout padlocks.
- Allows for lockout by up to six workers.
- Heavy gauge steel resists prying.

Width: - 1-3/4 in

Shackle Length: 1 in

No. of Padlocks: 6



SKU	Color	Length
470-420	Red	4-1/2 in

Zenex™ Thermoplastic Safety Lockout Padlocks

Features:

- Designed exclusively for lockout tagout applications.
- Durable, lightweight, non-conductive Thermoplastic lock body.
- Customize on-site with permanent, write-on labels.
- Compliance with "One Employee, One Lock, One Key" directive.
- High security, reserved-for-safety cylinder.
- Key retaining, ensures that padlock is not left unlocked.



SKU
470-410RED

Padlocks & Cables



Solid Aluminum Padlocks

Features:

- Highly corrosion resistant.
- Laser engravable.
- Available in silver, red, blue, black, green, orange, purple, gold, and brown colors.

Shackle Diam: 1/4 in

Shackle Inner Width: 3/4 in

Shackle Material: Case Hardened Boron Alloy Steel



SKU	Code Format	Shackle Length
045-A1106RED	5-Pin Tumbler Rekeyable Cylinder	1-1/2 in



No. 175 Combination Brass Padlocks

Features:

- Set-your-own combination convenience.
- Resettable to any of 10,000 personalized combinations.

Shackle Diam: 5/16 in

Shackle Inner Width: 1 in

Shackle Material: Hardened Steel



SKU	Code Format	Shackle Length
470-175LH	4 Step Dial	2-1/4 in

RESPIRATORY PROTECTION

Cartridge Respirator Parts & Accessories



3M™ 2000 Series Particulate Filters

Features:

- Lightweight and easy to breathe through.
- Bayonet compatibility allows use with many 3M™ half and full facepieces and certain 3M™ Scott™ full facepieces.
- Assortment of filters available for a wide range of applications.

Filtration Grade: P100

For Model: 3M™ Cartridges 6000 Series; Reusable Respirators



SKU	Resistance
142-2091	Oil and Non-Oil Based Particles
142-2097	Nuisance Level Organic Vapor



3M™ 6000 Series Multi Gas/Vapor Cartridge/Filter



Features:

- Swept-back design allows an enhanced field of view and comfort.
- Bayonet compatibility allows use with many 3M™ Half and Full Facepiece Respirators.
- Wide range of applications reduces inventory needs.
- Simple installation and usage requirements reduces training requirements.

For Model: 3M™ Half/Full Facepieces 6000, 6500, 7000, 7500, 7800S, and FF-400 Series with bayonet filter holders

SKU	Resistance
142-6001	Organic Vapors (OV)
142-6003	Acid Gases (AG); Organic Vapors (OV)
142-6006	Formaldehyde; Organic Vapors (OV)

3M™ Faceshield Cover 6885/07142



Features:

- Replacement parts extend the life of the branded respirator.
 - Accessories provide increased versatility and comfort.
 - Offers convenience coupled with cost savings.
- Usage: Manufacturing; Marine; Mining; Oil & Gas; Transportation

SKU	For Model
142-6885	5000 Series; 6000 Series

3M™ Filter Retainer 501



Features:

- Easy attachment to the 3M range of half and full face pieces.
- Helps provide dual protection against vapor and particulates.
- Provides cost effective filtering solution when multiple filters are needed.
- Works with 3M Respirator 5000 Series, 3M Cartridges 6000 Series and 3M™ Filter Adapter 603.

SKU	For Model
142-501	5000 Series; 6000 Series; Filter Adapter 603



3M™ Multi Gas/Vapor Cartridge/Filter



Features:

- Unique design for enhanced comfort and visibility.
- Particulate filter is permanently attached to cartridge for easy, one-step assembly.

Filtration Grade: P100

For Model: 3M™ Reusable Respirators

SKU	Resistance	Usage
142-60921	Organic Vapor;Asbestos;Mold;Silica	Contaminants
142-60923	Acid Gases; Organic Vapors	Contaminants
142-60926	Multi-Gas/Vapor	General Protection

3M™ Particulate Filters



Features:

- NIOSH approved for environments containing certain non-oil based particles.
- Bayonet compatibility allows use with many 3M™ half and full facepieces and certain 3M™ Scott™ full facepieces.

For Model: 3M Respirators 5000 Series;3M Cartridges 6000 Series;3M Filter Retainer 501

Usage: General Protection

SKU	Type	Resistance	Filtration Grade
142-5N11	Filter	Non-Oil Based Particles	N95
142-5P71	Pre-Filter	Certain Oil and Non-Oil Particles	P95



AUTHORIZED DISTRIBUTOR

Combination Gas and Vapor Cartridges



Features:

- Convenient cartridge/P100 filter combination.
- Packed in pairs for fast, easy change outs.
- Color coded for quick and easy identification.
- Filters out different vapors.

Filtration Grade: P100

Usage: Contaminants

SKU	For Model
068-7581P100L	5500, 7700 Half Masks; 5400, 7600 Full Facepieces
068-7583P100L	5400/5500 Series; 7600/7700 Series; RU6500/RU8500 Series

Defender™ Multi-Purpose Cartridges



Features:

- Convenient cartridge/filter combination.
- Color coded for quick and easy identification.

Filtration Grade: P100

Usage: Contaminants

SKU	For Model
068-75SCP100L	5400/5500 Series; 7600/7700 Series; RU6500/RU8500 Series



AUTHORIZED DISTRIBUTOR

Gas and Vapor Cartridges



Features:

- Lower profile so cartridges don't intrude into the work zone.
- Easy user seal check.
- Threaded connectors that fit North® half masks and full facepieces.

Resistance: Organic Vapor

SKU	For Model
068-N75001L	5500, 7700, 8500, 8800 Half Masks; 5400, RU6500, 7600 Full Facepieces

Particulate Filters



Features:

- Can be used alone with filter holder and cover (N750037) or with any Honeywell North N-series cartridge (with N750036).
- Low profile with curved top will not catch on pipes or other objects.

Resistance: All particulates

Filtration Grade: P100

Usage: All particulates

SKU	For Model
068-7580P100	5500, RU8500 and 7700 Half Masks;5400, RU6500 and 7600 Full Facepieces

Cartridge Respirators



3M™ 6000 Series Full Facepiece Reusable Respirator



Features:

- Unique center adapter directs exhaled breath and moisture downward, and helps reduce debris from depositing in the valve.
- Smooth surface allows for quick and easy cleaning.
- Large lens provides a wide field of view and excellent visibility.
- 3M™ Cool Flow™ Valve provides cool, dry comfort.
- Lightweight well-balanced design and silicone face seal for enhanced comfort and durability.

Body Material: Silicone;Thermoplastic Elastomer

Resistance: Gases;Vapors;Particulates

SKU	Size Group
142-6800	Medium
142-6900	Large

3M

3M™ 7500 Series Half Facepiece Reusable Respirator

**Features:**

- Advance silicone material for increased comfort and greater durability.
- Proprietary 3M™ CoolFlow™ Valve helps makes breathing easier.
- Dual mode head harness adjusts easily for either standard or drop-down mode.
- Exhalation valve cover directs exhaled breath and moisture downward to reduce fogging.

Body Material: Silicone

SKU	Size Group
142-7502	Medium
142-7503	Large

3M™ 6000 Series Half Facepiece Reusable Respirator

**Features:**

- Half facepiece drop down.
- Used with 2000, 6000 and 7000 Series filters and cartridges.
- Remarkably comfortable with soft, lightweight facepiece and the easy-to-adjust head straps.
- Reusable.
- Just dispose of the cartridges/filters when used to capacity.

Body Material: TPE

SKU	Size Group
142-6100	Small
142-6200	Medium
142-6300	Large

Honeywell
NORTHAUTHORIZED
DISTRIBUTOR

7600 Series Silicone Full Facepiece Respirators

**Features:**

- Designed to provide eye, face and respiratory protection while ensuring optimal comfort and performance.
- Its dual flange silicone seal gives this facepiece superior fitting characteristics.
- Lens provides 200 degree field of vision, provides excellent optics, is scratch resistant and meets ANSI standards for impact resistance.
- Cartridge/filter sold separately.

Resistance: Particulates;Chemical;Contamination;Gas

SKU	Body Material	Size Group
068-760008A	Silicone	Medium/Large

Honeywell
NORTHAUTHORIZED
DISTRIBUTOR

7700 Series Half Mask Respirators

**Features:**

- Silicone facepiece conforms to facial features.
- Contoured sealing flange and cradle suspension system eliminates discomfort.
- Cradle suspension system allows the facepiece to seal evenly on the face without creating pressure points.

Resistance: Particulates; Chemical; Contamination; Gas

SKU	Body Material	Size Group
068-770030M	Silicone	Medium
068-770030L	Silicone	Large

Disposable Respirator Parts & Accessories

Honeywell
NORTHAUTHORIZED
DISTRIBUTOR

Mouthbit Escape Respirators

**Features:**

- Mouthbit respirators offer a quick and economical method to escape non-IDLH emergency situations.
- Large, soft and flexible nose pads hold securely without pinching.
- Wider nose clip fits a variety of facial types.
- Silicone mouthpiece is more comfortable to wear over long periods.
- Packed in sealable plastic bag (carrying bag sold separately --79BAG).

Resistance: Chlorine; Hydrogen Chloride; Hydrogen Fluoride; Hydrogen Sulfide; Sulfur Dioxide; Chloride Dioxide**Depth:** 9 in**Height:** 3 in**Width:** 4-1/2 in

SKU	Type
068-7902	Acid Gas

Disposable Respirators

3M

3M™ Particulate Respirators

Features:

- Two-strap design with single point attachment helps provide a secure fit.
- Adjustable noseclip reduces eyewear fogging and helps ensure a better fit and seal.
- Lightweight construction enhances worker comfort and wear time.
- Patented filter media with advanced electrostatically charged microfibers help make breathing easier and cooler for enhanced user comfort.

Resistance: Dust; Non-Oil Particulates

Suspension: Two Fixed Straps



SKU	Protected Area	Filtration Grade	Includes
142-8210	Half Facepiece	N95	Adjustable Noseclip
142-8210V	Half Facepiece	N95	3M™ Cool Flow™ Valve; Adjustable Noseclip
142-8511	Half Facepiece	N95	3M™ Cool Flow™ Valve; M Noseclip

GERSON

Value, Quality & Performance

Nuisance Dust Masks

Features:

- To reduce the irritating effects from non-toxic particles such as pollen, common household dust and cut grass.
- Adjustable nosepiece.

Resistance: Dust; Non-Toxic Particles; Pollen



SKU	Protected Area
316-1501	Half Facepiece

MOLDEX

2200 Series N95 Particulate Respirators

Features:

- For humid and/or dusty work environments, this is a mask that fits the bill.
- Dura-Mesh® shell stands up to extreme heat environments while providing better protection to the filter.
- Contoured face seal and molded nose bridge deliver enhanced comfort, particularly during extended periods of wear.

Resistance: Non-Oil Based Particulates

Suspension: 2-Strap



SKU	Protected Area	Filtration Grade
507-2200N95	Half-facepiece	N95

MOLDEX

2300 N95 2-Strap Particulate Respirators with Exhale Valve

Features:

- Exhale valve lets workers breathe easy and stay cool.
- Dura-Mesh® shell resists collapsing in heat and humidity.
- Molded nose bridge seals easily without a metal noseband.
- Facepiece is naturally contoured for less pressure.
- Straps are securely attached so they don't break at the seal.
- Softspun® lining for increased comfort and durability.
- Soft foam nose cushion for added comfort.

Size Group: Medium/Large

Resistance: Non-Oil Based Particulate Aerosols

Suspension: 2-Strap



SKU	Protected Area	Filtration Grade
507-2300N95	Half Facepiece	N95

SAFETY STORAGE

Safety Cans

EAGLE

Justrite Safety Group

Type I Safety Cans

Features:

- Electric seam weld joins top and body.
- Stainless steel flame arrestor.
- Sturdy 16 gauge shock rim for bottom support.

Dia.: 12-1/2 in

Height: 15-1/2 in

Material: Galvanized Steel

Resistance: Chemicals

Includes: Funnel



SKU	Capacity Vol.	Type
258-UI50FS	5 gal	Flammables



Type I Steel Safety Cans

Features:

- Color coding avoids accidents.
- Self-closing lid controls spills.
- Leakproof, auto-venting lid prevents explosion.
- Cans up to 1 quart feature a trigger-release handle, while larger capacities have a swinging handle to greatly ease carrying of heavier loads.

Dia.: 11.75 in

Height: 16.875 in

Material: 24-ga Galvanized Steel

Includes: Stainless Steel Flame Arrestor; Swinging Handle



SKU	Capacity Vol.
400-7150100	5 gal

Type II AccuFlow™ Safety Cans

Features:

- Color coding avoids accidents.
- Stainless steel flame arrester prevents flashback ignition.
- Easy-to-use Safe-Squeeze® trigger for controlled pouring.
- Two-openings, one for targeted pouring, one with ergonomically designed lift-lever for easy filling.

Dia.: 11.75 in

Height: 17.5 in

Hose O.D.: 1 in

Material: 24 ga Galvanized Steel

Includes: Flexible Metal Hose



SKU	Capacity Vol.	Color
400-7250130	5 gal	Red
400-7250230	5 gal	Yellow

SPILL CONTROL SAFETY

Sorbents



Oil-Only Sorbent Pads

Features:

- White absorbents pick up petroleum-based fluids, paints and non-water soluble chemicals while repelling water - great for indoor & outdoor use.
- Meltblown polypropylene absorbents feature economical, single-ply construction.
- Perforations provide cost control and reduce waste by allowing you to use only what you need.

Absorption: 20.5 gal



SKU	Length	Width
103-AB-BP0100	17 in	15 in



Universal Sorbent Pads

Features:

- Highly versatile, grey absorbents pick up water-based, petroleum-based and non-aggressive, chemical fluids.
- Meltblown polypropylene absorbents feature economical, single-ply construction.
- Perforations provide cost control and reduce waste by allowing you to use only what you need.

Absorption: 20.5 gal



SKU	Length	Width
103-AB-BPU100	17 in	15 in

TRAFFIC SAFETY

Safety Tapes



Economy Barrier Tape

Features:

- Sturdy safety tape.
- Repeat wording clearly identifies hazard.
- Bright colors and Bolder Print to attract attention.
- Durable, yet easily disposable.

Width: 3 in

Length: 1000 ft

Material: Polyethylene



SKU	Depicted Text	Color
101-R10003	Danger	Red
101-Y10003	Caution	Yellow



Safety Barricade Tapes

Features:

- Safety tapes indicating warning or danger areas.
- Large bold lettering is easy to read at a distance.
- Durable plastic material remains pliant in cold weather.

Width: 3 in

Length: 1,000 ft

Material: Plastic



SKU	Depicted Text	Color	Thickness
272-77-1004	Danger	Red	4 mil
272-71-1001	Caution	Yellow	2 mil

ARC GOUGING

Arc Gouging Electrodes



DC Copperclad Gouging Electrodes

Features:

- Full synthetic graphite.
- Superb arc starting and stability.

Length: 12 in

Model Type: Pointed

SKU	Amps	Coating	Dia.
900-22-033-003X	200 A - 250 A	Copper	3/16 in
900-22-043-003X	300 A - 400 A	Copper	1/4 in
900-22-053-003X	350 A - 450 A	Copper	5/16 in
900-22-063-003X	450 A - 600 A	Copper	3/8 in

FILLER METALS

MIG Welding Wires



ER70S-6 MIG Premium Welding Wires

Features:

- Mild steel welding wire that contains high levels of manganese and silicon which produces high quality welds when used on dirty, oily or rusty steel.
- The high silicon content increases the fluidity of the weld pool, creating a smoother bead appearance resulting in minimal post-weld grinding.
- Engineered to provide porosity-free, x-ray quality welds at the highest tensile strength of all the plain carbon steel wires.

Dia.: 0.035 in

SKU	Tensile Strength	Material	Wt.
900-70S6035X33S	85,000 psi	Carbon Steel	33 lb
900-70S6035X44S	85,000 psi	Carbon Steel	44 lb

ER70S-6 MIG Welding Wires

Features:

- High quality welds when used on dirty, oily, or rusty steel.
- Creates a smooth bead appearance resulting in minimal post-weld grinding.
- Provides porosity free, x-ray quality weld.



SKU	Tensile Strength	Material	Dia.	Wt.
900-70S6035X33-BOX	550 MPa	Carbon Steel	0.035 in	33 lb
900-70S6035X33-PLT	550 MPa	Carbon Steel	0.035 in	2,376 lb
900-70S6035X44-PLT	550 MPa	Carbon Steel	0.035 in	2,640 lb
900-70S6045X44-PLT	550 MPa	Carbon Steel	0.045 in	2,640 lb

TIG Welding Wires



ER308L TIG Welding Rods

Features:

- Used for welding types 304, 304L, 308 and 308L stainless steels.
- Very similar to type 308 but has a carbon content held to a max of 0.03% to avoid carbide precipitation.

Wt.: 10 lb



SKU	Tensile Strength	Material	Dia.
900-308L116X36x10	84 kpsi	Stainless Steel	1/16 in
900-308L18X36x10	84 kpsi	Stainless Steel	1/8 in
900-308L332x36x10	84 kpsi	Stainless Steel	3/32 in

ER316L TIG Welding Rods

Features:

- Used for welding types 316 and 316L stainless steels.
- Maximum carbon content of 0.03% to reduce the possibility of formation of intergranular carbide precipitation.
- Primarily used for welding low carbon molybdenum bearing austenitic alloys.



SKU	Tensile Strength	Material	Dia.
900-316L18X36x10	55 ksi	Stainless Steel	1/8 in
900-316L332X36x10	55 ksi	Stainless Steel	3/32 in
900-316L532x36x10	55 ksi	Stainless Steel	5/32 in

Welding Stick Electrodes



Mild Steel Electrodes

Features:

- Excellent arc starting and stability.
- For best performance, store in rod oven at recommended temperature.

Length: 14 in

Type: E7018



SKU	Material
900-7018-18X5	Carbon Steel
900-7018-18X50	Carbon Steel
900-7018-332X5	Carbon Steel
900-7018-332X50	Carbon Steel

Welding/Brazing Alloys & Fluxes



E71T-GS Flux Cored Welding Wires

Features:

- All position, single pass, flux cored welding wire designed to weld carbon steel.
- Shielding gas is not required.
- Produces smooth arc action, low spatter, full slag coverage, and easy slag removal.

Packing Type: Carton

Tensile Strength: 70,000 psi



SKU	Material	Dia.	Wt.
900-71TGS030X2	E71T-GS Alloy	0.030 in	2 lb
900-71TGS035X10	E71T-GS Alloy	0.035 in	10 lb
900-71TGS035X2	E71T-GS Alloy	0.035 in	2 lb

GAS CUTTING & WELDING

Quick Connects



Quick Connect Sets

Features:

- Non-interchangeable oxygen and fuel gas connectors.
- Instant closure on reverse flow check valves.
- Spring-loaded locking mechanism responds to fingertip action and achieves a gas-tight connection.
- Double seal socket connection on second seal.

Material: Brass

Gas Type: Fuel Gas; Oxygen

SKU	Connection Type	Includes
312-QDB10	Torch-to-Hose	QDB11; QDB12

Tips & Nozzles



Victor® Style 1-Pc Acetylene Cutting Tips - 1-101 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for general hand and machine cutting.

Material: Copper

Gas Type: Acetylene; Oxygen

Used With: 2460; CA 1060; ST; SST; 1400C

SKU	Tip Size Symbol	Orifice
900-1-101-0	0	0.041 in
900-1-101-1	1	0.047 in
900-1-101-2	2	0.060 in
900-1-101-3	3	0.071 in
900-1-101-4	4	0.083 in

Torches & Handles



Max Performance Torch Heads

Features:

- The Bernzomatic® Max Performance Torch is built with instant on/off ignition, an adjustable ultra-swirl flame and flame lock option for continuous use.
- It is pressure regulated for consistent performance when inverted, making it ideal for large diameter soldering, light brazing, woodworking and cooking.

Uses Cutting Tip: Swirl Flame

For Model: 14.1 oz MAP-Pro®; 14.1 oz and 16 oz Propane Fuel Cylinders



SKU	Length
189-361530	14 in

MANUAL WELDING

Electrode Holders



Electrode Holders - High Tong Type

Features:

- Lever designed for better hand clearance and better hold.
- Made from high quality materials for both high conductivity and improved cable connections.
- Ergonomically designed heavy-duty shock-proof nylon handle.

Body Material: Brass



SKU	Amps	Electrode Cap.	Cable Cap.	Length
900-A-316	250 A	4 mm	1/0	9.25 in
900-A-532	200 A	3.2 mm	#3	8.46 in

MIG WELDING

Mig Gun Parts & Accessories



MIG Contact Tips

Features:

- Works with Best Welds® gas diffuser or equivalent OEM MIG guns.
- Industry part number easily recognizable.
- Durable and precise.

Used With: Best Welds® 250/400; Tweco® No 2, 3 and 4

Overall Length: 1.5 in



SKU	Tip I.D.	Material	Wire Size
900-14H-35	0.044 in	Copper	0.035 in
900-14-35	0.044 in	Copper	0.035 in
900-14-45	0.054 in	Copper	0.045 in

SOLDERING & BRAZING

Soldering/Brazing Torches

BERNZOMATIC®

High Heat Torch

Features:

- Work faster and more efficiently with maximum heat.
- Ideal for job site projects including large soldering, brazing, heat treating and light welding.
- Large, optimized swirl flame provides maximum heat output.
- Cast aluminum body for durability.
- Pressure regulated for consistent performance when tilted or momentarily inverted.
- Run-lock button keeps the torch lit for continuous use.

Process: Brazing; Heat Treating; Large Diameter Soldering



SKU	Gas Type	Body Material
189-361524	MAPP® (Methyl Acetylene-Propadiene)	Cast Aluminum

TORCH & WEED BURNERS

WESTERN
a Scott Fetzer company
GAS CONTROL TECHNOLOGY

Hotspotter All Purpose Propane Torches

Features:

- Flame tools are for exterior maintenance and repair.
- Hotspotter is an all-purpose propane torch that delivers at full cylinder pressure with no smoke and no fumes.
- Ergonomic handle with adjustable trigger.
- Hooks up to standard 20-pound propane tank.

Gas Type: Propane

Handle Length: 31 in

Hose Length: 10 ft

Includes: Brass Propane Tank Adaptor; Brass Flow Control Shut-Off Valve; Spark Ignitor; Cast Iron and Steel Nozzle; Hose



SKU	Output Power
312-WB-101	500000 Btu

WELDING & CUTTING ACCESSORIES

Anti-Spatter & Chemicals

BEST WELDS®

Anti-Spatters

Features:

- Helps protect MIG gun nozzles, contact tips, accessories and all welding zones during single- and multi-pass welding.
- Non-flammable.
- Reduces spatter build-up on MIG nozzles, prevents spatter adhesion.
- Heat-resistant to withstand high temperature use.
- Paint compatible.
- Contains no silicones, no fluorocarbons.

Chemical Compound: Solvent-Based

Physical Form: Liquid



SKU	Capacity Vol.
905-620-160Z	16 oz

Lube Pads

Features:

- Eliminates erratic wire feed caused by dust particles of flashing being trapped inside conduit lines.
- Contains no solvents, abrasives, carbon, sulfur, nitrogen, moly disulphide or silicon.
- Non-flammable, non-toxic.



SKU
905-LUBE-PAD-6PK-TREATED

Nozzle Dip Gels

Features:

- Prevents spatter build up on nozzles and tips.
- Odorless—no unpleasant or harmful odors.

Chemical Compound: Petroleum Jelly

Color: Blue



SKU	Capacity Vol.
905-NOZZLE-DIP	16 oz

Centering Heads



Centering Heads

Features:

- Aids in setting of center lines, establishing angles and marks for butt-ins, location points inside pipes and tanks, laying out keyways, and measuring declivity.
- The Y-type head is fitted with an adjustable dial bubble protractor (DSL).
- Use a tapping hammer to operate the hardened centering pin.



Head Type: Y-Type

Type: #6 Standard Centering Head; DSL

SKU	Pipe Cap.	Head Width
430-14775	1/2 in - 4 in	4 in

Cutting & Burning Guides



Rap-Around Pipe Templates

Features:

- Has a tough edge to protect from fraying and splitting which extends the life of the product.
- Clear vinyl container for protection in between jobs.



SKU	Size Group	Width	Length	Pipe Capacity
900-RA150	Small	2-1/2 in	2 ft	1 in - 3 in
900-RA160	Large	4 in	4 ft	3 in - 6 in
900-RA170	Large	4 in	6 ft	3 in - 10 in



Wrap-A-Round® Rulers

Features:

- Feature metric scale and pitch chart.
- Resists heat and cold.

Length: 6 ft

Resistance: Cold; Heat

Pipe Capacity: 3 in - 10 in



SKU	Size Group	Width
430-14753	Large	3.88 in

Cylinder & Caps



MAP-Pro™ Hand Torch Cylinders

Features:

- Ideal for medium to heavy soldering and brazing.
- Flame temperature in air is 3600 degrees F.

Wt.: 1.9 lb



SKU	Gas Type
870-332477	MAP-Pro™

TX 9 Propane Cylinders

Features:

- Ideal for general soldering.
- Flame temperature in air is 3450 degrees F.

Capacity Vol.: 14.1 oz

Wt.: 1.9 lb



SKU	Gas Type
870-304182	Propane

Cylinder Pliers & Wrenches




Box Tank Wrenches

Features:

- Designed for B & MC acetylene valves.

Material: Steel

Used With: Acetylene Tanks



SKU	Opening Size	Length
900-00W5	3/16 in	3-1/8 in

Dry Rod Ovens



Electrode Ovens

Features:

- Includes external thermostat control.
- Each oven is tested and heated to rated temperature before shipping.

Temp. Range: 175° F - 300° F

Voltage: 110 V

Digital Thermometer: No



SKU	Capacity Wt.	Size Electrode Handled	Watts
900-BW-ELECTRODE-OVEN-ET	10 lb	18 in	80 W
900-50LB-ELECTRODE-OVEN	50 lb	18 in	220 V

Ground Clamps



Ground Clamps

Features:

- Contoured handle lever for easy jaw opening.
- Large contact area assures positive grounding.
- Conductor body holds the cable securely.

Jaw Opening: 2 in

Throat Depth: 3.86 in

SKU	Amps	Cable Cap.
900-TGC-300	300 A	3/0

Steel Ground Clamps

Features:

- Galvanized steel plated.
- Large hex screw cable connection assures safe cable connection every time.
- Pure copper braided shunts allows both jaws to carry welding current.

Jaw Opening: 2 in

Throat Depth: 6.2 in



SKU	Amps	Cable Cap.
900-EG-500	500 A	3/0

Rod Holders



Rod Storage Tubes

Features:

- Easy way to store and organize all of your filler metals properly.
- 1/8-inch nominal wall thickness for superior strength and durability.
- Neoprene seal keeps your rods air and water tight.
- Each rod storage tube comes with a key tag to identify the contents.
- Made of high impact polyethylene.

SKU	Capacity Wt.	Color
900-BW14-RED	10 lb	Red
900-BW36-BLU	10 lb	Blue
900-BW14-BLU	10 lb	Blue

Spark Lighter & Flints



SL-3F Spark Lighters

Features:

- Triple flint lighter.
- Consistent, reliable sparking.
- Long lasting.

SKU
900-SL-3F

SL-E Spark Lighters

Features:

- Single flint lighter.
- Consistent, reliable sparking.
- Long lasting.



SKU
900-SL-E



Flints

Features:

- Economically priced and designed for any of the Shurlite® family of flint lighters.
- Guaranteed to fit perfectly on Shurlite® lighters.
- Guaranteed to remain seated in the flint holder.
- Larger size for longer life.

SKU
322-5012X

Shurlite® Spark Lighters

Features:

- Strong frame and rugged design.



SKU
322-3001
322-4501

Tip Cleaners



Tip Cleaner Sets

Features:

- Constructed of stainless steel.
- Rust-proof.
- Tapered ends for easy cleaning.

Dia.: 0.014 in; 0.018 in; 0.021 in; 0.024 in; 0.028 in; 0.032 in; 0.035 in; 0.037 in; 0.039 in; 0.042 in; 0.048 in; 0.055 in; 0.062 in

Size Group: 6 to 26

Used With: Welding Tips

SKU	Material	Includes
900-STC	Stainless Steel	(13) Cleaners; Case; File



Tip Cleaner Sets

Features:

- Uniform ridges wipe and polish the orifice wall.
- Tapered ends allows smooth easy entry without scratching.
- Attractive aluminum case with a contained spool assembly.
- Smooth leader pilot.
- Tangle-free closed loops.

Dia.: 0.014 in; 0.018 in; 0.021 in; 0.024 in; 0.028 in; 0.032 in; 0.035 in; 0.037 in; 0.039 in; 0.042 in; 0.048 in; 0.055 in; 0.062 in

Size Group: 6 to 26

Used With: Welding Tips



SKU	Material	Includes
326-STANDARD	Stainless Steel	(13) Cleaners; Case; File

Welding Blankets, Curtains, & Rolls




Curtain Frames

Features:

- Providing sturdiness and strength, square steel tubing and bolted bracket system prevent slipping and twisting.
- Combined with Best Welds safety fabrics, curtain frames provide protection for welding areas, machine shops, grinding and other safety applications.
- Quick assembly design.

Material: Steel

Includes: 1 in Square Steel Tubing; Bolted Brackets; 24 in Platform T Legs; Lacing Ties



SKU	Length	Width
902-CURTAIN-FRAME	6 ft	6 ft



Roll Goods

Features:

- Protects against light sparks and spatter.
- Grommeted and hemmed with fiberglass thread.
- Designed for use in areas where a fabric with high heat resistance is required.



SKU	Length	Width	Color
902-RG-2025-60	50 yd	60 in	Tan
902-RG-2523RA-40	50 yd	40 in	Red

Welding Blankets

Features:

- Protects against light sparks and spatter.
- Grommeted and hemmed with high temperature thread.
- Designed for use in areas where a fabric with high heat resistance is required.



SKU	Length	Width
902-2025-18-6x8	6 ft	8 ft

Welding Curtains

Features:

- Heavy duty PVC designed to filter far/ near UV radiation and blue light.
- Transparent curtains providing UV and blue light protection when visibility is necessary.
- Curtains are grommeted across top and in each corner.
- Hemmed with high temperature thread.



SKU	Length	Width
902-CURTAIN-6X8-ORG	8 ft	6 ft

Welding Cables & Power Cables



Welding Cables

Features:

- Resistant to oil, chemicals, and solvents.

Amps: Consult Ampacity Chart

Jacket Material: EPDM

Number of Conductors: 1

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper



SKU	Cable/Wire Description	Temp Range	Insulation Thickness
911-2/0-500	2/0 AWG x 500 ft	-50° C (-58° F) - 105° C (221° F)	0.08 in
911-1/0-250	1/0 AWG x 250 ft	-50° C (-58° F) - 105° C (221° F)	0.08 in
911-1/0-500	1/0 AWG x 500 ft	-50° C (-58° F) - 105° C (221° F)	0.08 in
911-2-500-RED	2 AWG x 500 ft	-50° C (-58° F) - 105° C (221° F)	0.06 in
911-4-500-RED	4 AWG x 500 ft	-50° C (-58° F) - 105° C (221° F)	0.06 in

Welding Clamps, Spreaders & Holders



Multi-Purpose Magnetic Holders

Features:

- Enables fast and accurate holding of any ferrous object.
- Can be utilized as double-sided holder for welding and assembly work.
- Will hold sheets or tubes at 45°, 90° and 135° angles.
- Compact design allows use in tight places.



SKU	Capacity Wt.	Length	Width	Height
900-M-065	95 lb	9 in	5 in	0.88 in
900-M-063	80 lb	6.3 in	4 in	0.63 in
900-M-061	45 lb	4-7/10 in	3-2/5 in	14/50 in

Welding Hoses



Grade R Single-Line Welding Hoses

Features:

- High quality Grade R single-line welding hoses.
- Grade R welding hoses are designed for carrying acetylene or oxygen to welding equipment.
- Green hose carries oxygen to welding equipment.
- Red hose carries acetylene.
- Hose cover resists oils.



SKU	Grade	Pressure	Hose I.D.	Length	Gas Type
907-3/8X1-GRN	R	200 psi	3/8 in	700 ft	Oxygen
907-1/4X1-GRN-RL	R	200 psi	1/4 in	800 ft	Oxygen
907-3/16X1-RED-RL	R	200 psi	3/16 in	800 ft	Acetylene

Grade R Twin-Line Welding Hoses

Features:

- High quality Grade R twin-line welding hoses.
- Green hose carries oxygen to welding equipment.
- Red hose carries acetylene.
- Hose cover resists oils.



SKU	Grade	Pressure	Hose I.D.	Length	Gas Type
907-LB504	R	200 psi	1/4 in	50 ft	Acetylene Only
907-LB3/16-TWIN-RL	R	200 psi	3/16 in	800 ft	Acetylene; Oxygen

Single Line Welding Hoses

Features:

- Open steam vulcanization curing process does not require pin pricking and offers improved cover and reinforcement adhesions for longer hose life.
- Superior ozone resistance.
- Non-staining coupling ensures that brass fitting will not discolor.
- 90% of reels are one-piece reels.
- Multiple length reels will be limited to max of 3 pcs and all pcs will be in 50 ft increments.
- Made in the USA

Hose I.D.: 3/8 in

Length: 700 ft

Gas Type: Acetylene Only



SKU	Grade	Pressure
907-3/8X2-RED	R	200 psi



BOSCO
BROS., L.L.C. NORCO, LA